
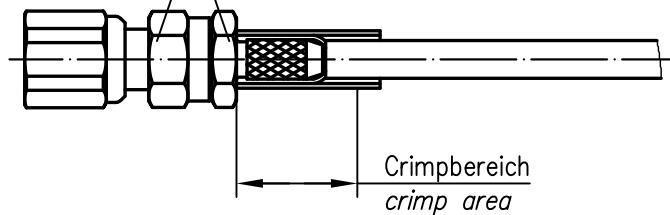


nach dem Einschrauben crimpen  
Anzugsmoment:  $0.8 \pm 0.1$  Nm  
crimp after screw in  
tightening torque:  $0.8 \pm 0.1$  Nm

SW 5.5  
hex 5.5



XX	Crimpeinsatz crimp insert	6kt.1 x Länge hex1 x length	6kt.2 x Länge hex2 x length
03	N01003A0009		3.25x8
13	N01003A0010		2.67x8
14	N01003A0014		3.65x8

c	23387	13.12.11	MA
b	11209	20.03.00	BJ
a	7000	14.08.96	BE
Index index	Änderung modification	Datum date	Name name

	Datum date	Name name
Gez. drawn	30.07.93	HM
Gepr. app'd	14.08.96	BE

**Series SMC crimp  
Serie SMC crimp**

Untert.- Art	TG-Nr.
R	T00100C1300



Original original	A4	Blatt sheet	1/1
----------------------	----	----------------	-----

Maßstab scale	2:1
------------------	-----

Ersatz für/replacement for