




RSB clip for 1 5/8" RLF, RLK, RLV, RAY

Product Description

In the impact of a fire in a tunnel the cable should remain functional as long as possible. Special fire resistant clamp type has been developed for keeping the RADIAFLEX® cable attached as long as possible onto the wall. It also prevents the cable from detaching from the wall that might block any escape route. Fire resistant clips (RSB clips) are made of metal and fixed with screws to the wall using metal plugs. In case of fire the round base will melt. But the fixation will hold the cable in position and enables the cable to keep in operation as long as the cable itself allows. The recommended spacing is 8 ? 10 m (26 ? 33 ft) for both kinds of installation.

RSB-158-001



Features/Benefits

Fire protection installation, keep the RADIAFLEX® cable in position during fire impact, stainless steel, Tool-2 for installation, should be used with metal plug and round base, for RCF 158-50

Technical Specifications


Product Line	Radiating Cable Accessories
Product Type	Hanger
Hanger Type	RSB clip for 1 5/8" RLF, RLK, RLV, RAY
Transmission Line Type	RLF*158 RLK*158 RAY*158 RLV*158
Cable Type	Radiating Cable
Cable Size	1-5/8"
Number of Cable / Waveguide Runs	1
Material	Stainless Steel
Installation Temperature, °C(°F)	-50 to 85 (-58 to 185)
Operation Temperature, °C(°F)	-50 to 85 (-58 to 185)
Storage Temperature, °C(°F)	-50 to 85 (-58 to 185)
Drill Hole Size, mm (in)	8 (0.315)
Package Quantity	10

Notes

Other Documentation



RSB clip for 1 5/8" RLF, RLK, RLV, RAY

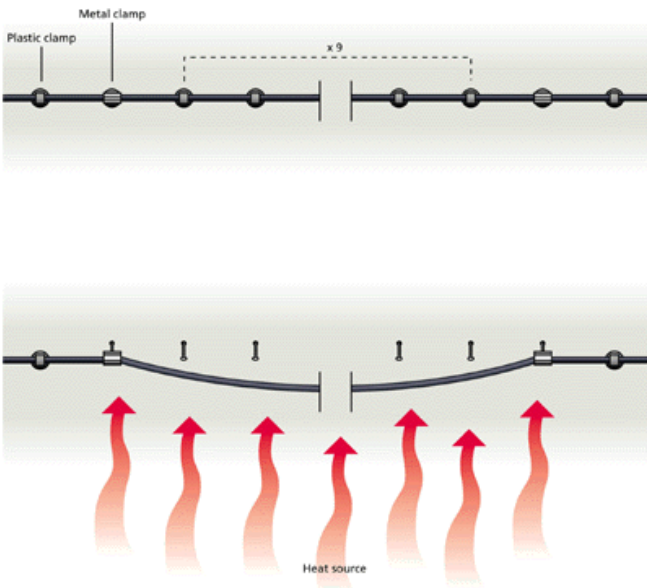

All information contained in the present datasheet is subject to confirmation at time of ordering