


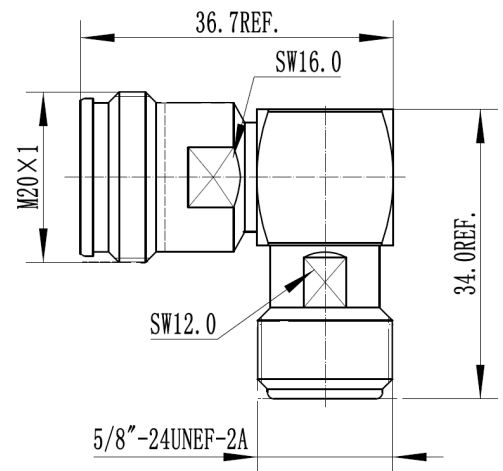

Coaxial Adapter 4.3-10 Female - N Female with right angle

## FEATURES / BENEFITS

**Technical features****STRUCTURE**

|              |  |                          |
|--------------|--|--------------------------|
| Product Line |  | Coaxial Cable Components |
| Product Type |  | Coaxial Adapter          |

**MECHANICAL SPECIFICATIONS**

|                            |  |                             |
|----------------------------|--|-----------------------------|
| Connector A                |  | 4.3-10 Female               |
| Center Contact Connector A |  | Copper Alloy, silver plated |
| Outer Contact Connector A  |  | Copper Alloy, CuSnZn plated |
| Connector B                |  | N Female                    |
| Center Contact Connector B |  | Copper Alloy, silver plated |
| Outer Contact Connector B  |  | Copper Alloy, CuSnZn plated |
| Dielectric                 |  | PTFE                        |
| Sealing class              |  | IP68, connected             |

**ELECTRICAL SPECIFICATIONS**

|                                   |           |                                                                                              |
|-----------------------------------|-----------|----------------------------------------------------------------------------------------------|
| Frequency Range - MHz             |           | DC - 6000                                                                                    |
| VSWR, Return Loss                 | VSWR (dB) | DC TO 2 GHz VSWR 1.05 (32.25)<br>2 TO 3 GHz VSWR 1.08 (28.3)<br>3 TO 6 GHz VSWR 1.12 (24.94) |
| Insertion Loss, dB (Max)          | dB        | 0.05                                                                                         |
| 3rd Order IM Product @ 2x20 Watts | dBc       | < -163                                                                                       |

**TEMPERATURE SPECIFICATIONS**

|                       |         |                        |
|-----------------------|---------|------------------------|
| Operation Temperature | °C (°F) | -40 to 85 (-40 to 185) |
|-----------------------|---------|------------------------|

**PACKAGING INFORMATION**

|                  |  |   |
|------------------|--|---|
| Package Quantity |  | 1 |
|------------------|--|---|

External Document Links

Notes