


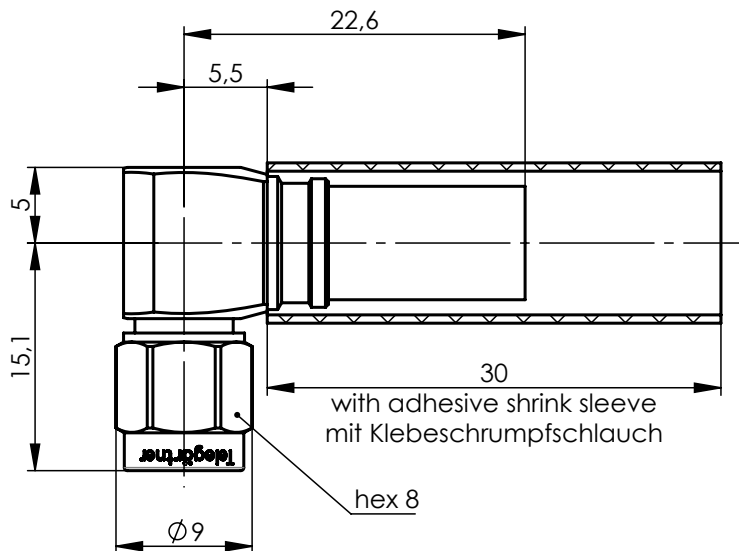

Mechanical characteristics

cables

interface dimensions acc. to assembly code
center conductor
outer conductor
mating life
coupling torque

Components

center conductor
crimp ferrule
other metal parts
insulator
gasket
adhesive shrink sleeve

Electrical characteristics

impedance
frequency
return loss

voltage proof
insulation resistance
contact resistance
center conductor
outer conductor

Environmental

operating temp.
protection class
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdrehmoment

Bauteile

Innenleiter
Crimprohr
sonstige Metallteile
Isolierung
Dichtung
Klebeschrumpfschlauch

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflussdämpfung

Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenleiter
Außenleiter

Umgebung

Betriebstemperatur
Schutzklasse
RoHS konform

1.4/3.8 AF, 7808A, CNT-240, HPF 240, LMR-240, MRC 240 AFB, S 04172 D, Speedfoam 240 HFJ, SX04172 B-60, TZC 500 25, WCX240

IEC 61169-15
B4731
clamp / klemm
crimp
>500
0,79-1,13 Nm

Materials / Material

Copper alloy / Kupferlegierung
Copper / Kupfer
Brass / Messing
PTFE
Silicone/ Silikon
Polyolefine

Finish / Oberfläche

NiP-Au
CuSnZn
CuSnZn

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight [g]	
			gez./ drawn	05.03.2025	PU		
			gepr./ appr.	18.07.2025	SST	ca./approx.	
			Maßstab/ scale	Benennung/ title			 Telegärtner
			2:1	SMA Plg 90 cl/cr LL240 SMA Plg 90 cl/cr LL240			
-	500000002119	17.07.2025	PU	untol. Maße/ dim. without tolerances according to	Untert./ doc. type	Materialnr./ material no.	
				CUG	100135115		 Maße/ dimensions: mm
				Ersatz für/ replaces	PDM Nr./ pdm no. 10018576		
						Original : DIN A4	
						Blatt/ sheet 1 von/ of 1	

