


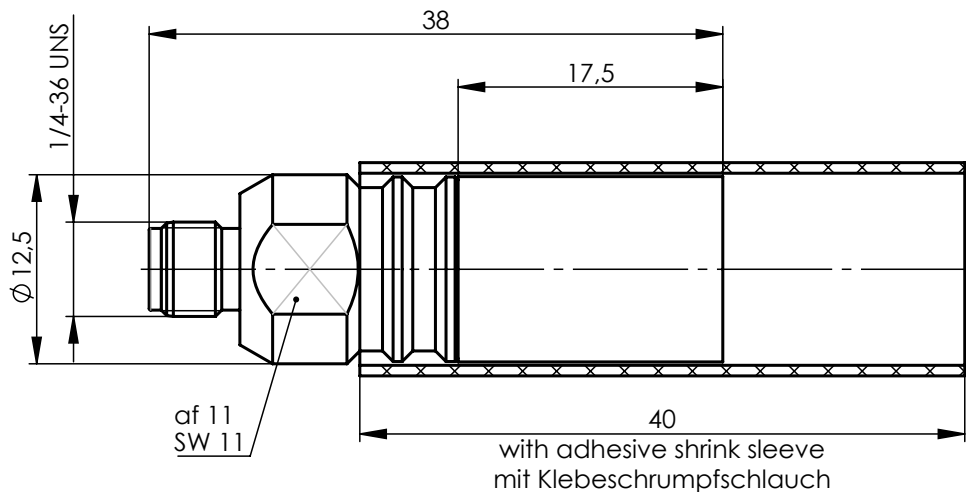

Mechanical characteristics

cables

interface dimensions acc. to assembly code

center conductor

outer conductor

mating life

coupling torque

Components

center conductor

crimp ferrule

other metal parts

insulator

adhesive shrink sleeve

Electrical characteristics

impedance

frequency

return loss

voltage proof

insulation resistance

contact resistance

center conductor

outer conductor

Environmental

operating temp.

protection class

RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung

Innenleiter

Außenleiter

Steckzyklen

Kupplungsdrehmoment

Bauteile

Innenleiter

Crimprohr

sonstige Metallteile

Isolierung

Klebeschrumpfschlauch

Elektrische Eigenschaften

Wellenwiderstand

Frequenz

Rückflussdämpfung

Prüfspannung

Isolationswiderstand

Durchgangswiderstand

Innenleiter

Außenleiter

Umgebung

Betriebstemperatur

Schutzklasse

RoHS konform

2.7/7.3 AF, 2.7/7.3 CF, 213CRT7 Low Loss, 7810A, 9913, C2FCP, C2FP, CNT-400, EC 400, HPF 400, LMR-400, MRC 400 AFB, Speedfoam 400 HFJ, TZC 500 32, WBC-400, WCX400

IEC 61169-15

B4812

clamp / klemm

crimp

>500

0,79-1,13 Nm

Materials / Material

copper alloy / Kupferlegierung

copper / Kupfer

brass / Messing

PTFE

Polyolefine

Finish / Oberfläche

NiP-Au

CuSnZn

CuSnZn

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name	Datum/ date	Name/ name	Gewicht/ weight [g]
			gez./ drawn	02.07.2025	PU	
			gepr./ appr.	28.08.2025	JA	ca./approx.
			Maßstab/ scale	Benennung/ title		
			2:1	SMA Jck str cl/cr LL400 SMA Jck str cl/cr LL400		
				 Telegärtner		
-	500000002183	26.08.2025	PU	untol. Maße/ dim. without tolerances according to	Unterl./doc. type	Materialnr./ material no.
				CUG	100135822	
				Ersatz für/ replaces	PDM Nr./ pdm no.	10020468
					Maße/ dimensions: mm	
					Original : DIN A4	
					Blatt/ sheet 1 von/ of 1	

