

MATERIAL & FINISH

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 COUPLING NUT: BRASS, NICKEL PLATED
- 4 CRIMP FERRULE: BRASS, NICKEL PLATED
- 5 INSULATOR: PTFE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6GHZ
- 3 VSWR: 1.30 MAX.





ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

MECHANICAL DATA:


- 1 CABLE RETENTION: >40 POUNDS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	ADDED TECHNICAL DATA	03/02/13	J. QU
G	CABLE STRIPPING DIMENSIONS CHANGED	07/14/15	J. QU

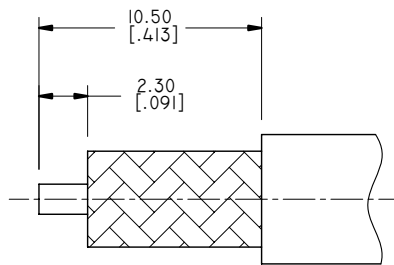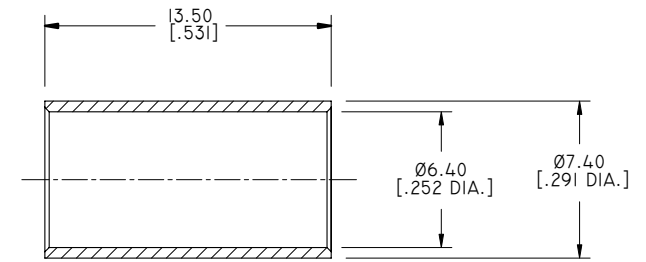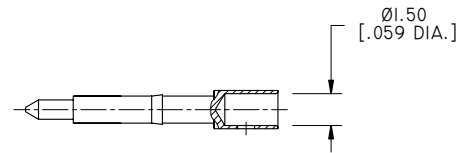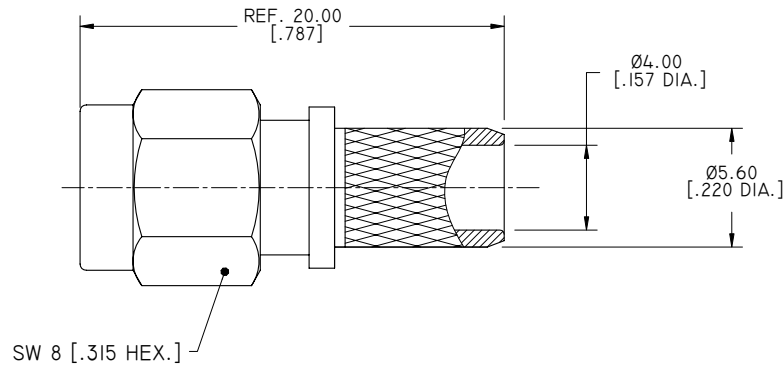

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 12.70 [.500]

DRAWN	X. B. YANG	DATE	07/14/15
CHECKED	L. YANG	DATE	07/14/15
APPROVED	J. QU	DATE	07/14/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
SMA STRAIGHT MALE CRIMP FOR LMR240 CABLE			
VIEW		PART NO.	
		ANO 2111-2006	
SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	G