

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 UNLOCK SLEEVE: BRASS, ALBALOY PLATED
- 5 CRIMP FERRULE: COPPER, NICKEL PLATED
- 6 O-RING: MVQ(SILICONE RUBBER)



ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.40 MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
E	PART NO. CHANGED	11/17/10	J. QU
F	PAINT CHANGED	08/07/13	J. QU

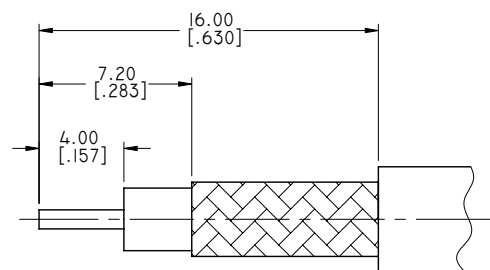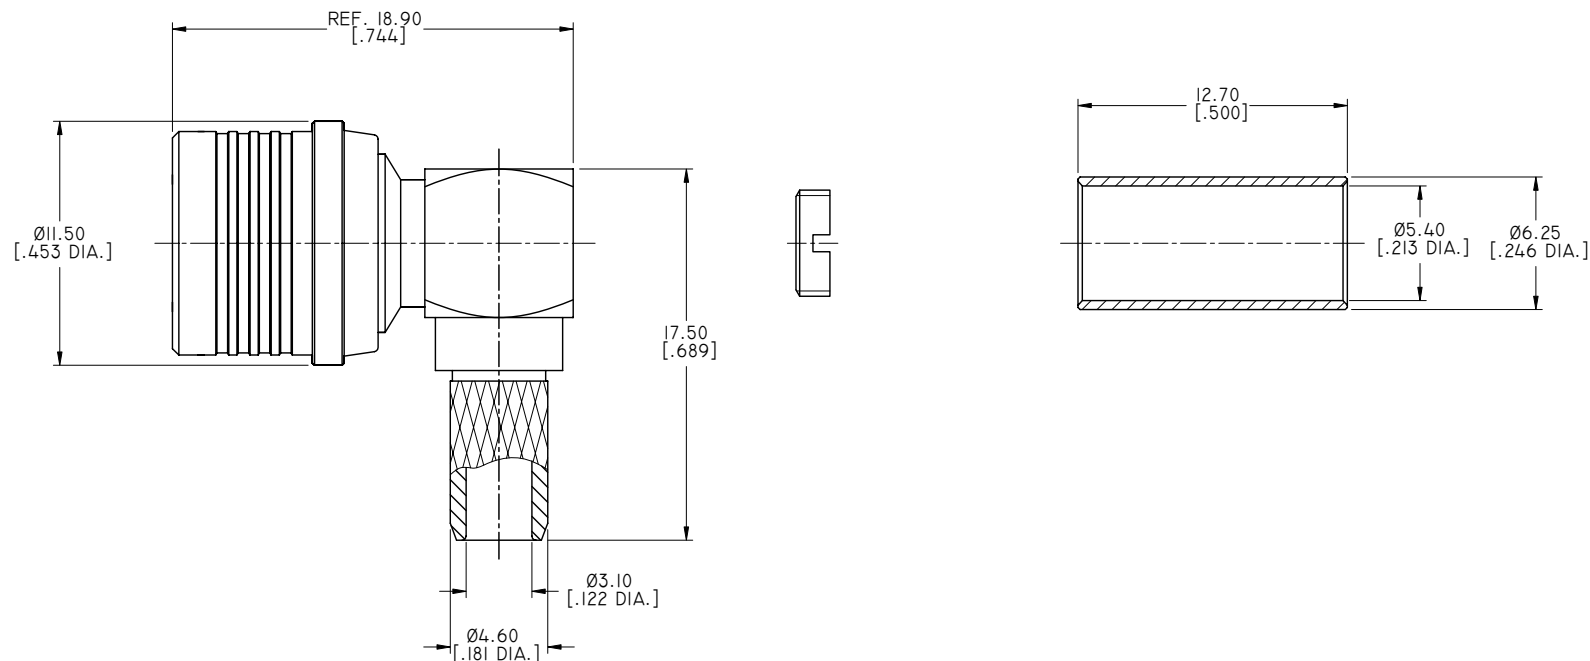

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 10.0 [.394]

DRAWN	H. ZHANG	DATE	08/07/13
CHECKED	X. B. YANG	DATE	08/07/13
APPROVED	J. QU	DATE	08/07/13
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2013 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
QMA RIGHT ANGLE MALE CRIMP FOR LMRI95/RG58 CABLE

VIEW	PART NO. ANO 2621-2016		
	SIZE A3	SCALE 4:1	SHEET 1/1
	REV. F		

4

3

2

1