



LB-CSJ-40400-2.4F Conical Dual Polarization Horn Antenna 4-40GHz  
16dB Gain 2.4mm Female

Conical Dual Polarization Horn Antenna Operating From 4GHz to 40GHz  
With a Nominal 16dB Gain With 2.4mm Female Connector

### Product Information

SKU	LB-CSJ-40400-2.4F	Patents	US D972539 (USA)
-----	-------------------	---------	------------------

### Description

Conical Dual Polarization Horn Antenna LB-CSJ-40400-2.4F, operating from 4 to 40GHz with a nominal 16dB gain and low VSWR 2.0:1 with 2.4mm Female output connector. The model LB-CSJ-40400-2.4F has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 10W continuously and 20W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This horn antenna has dual linear polarization and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

## Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	4	Output Type	Coaxial
Frequency, Max (GHz)	40	Connector	2.4mm
Gain, Typ (dBi)	16	Connector Gender	Female
Polarization	Dual Linear	Mechanical Specification	
3dB Beamwidth, E-Plane, Min (Deg.)	16	Body Material	Al
3dB Beamwidth, E-Plane, Max (Deg.)	83	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Min (Deg.)	11	Size, W (mm)	62
3dB Beamwidth, H-Plane, Max (Deg.)	75	Size, H (mm)	62
Cross Pol. Isolation, Min (dB)	20	Size, L (mm)	164.5
Cross Pol. Isolation, Typ (dB)	30	Weight, (kg)	0.19
Port to Port Isolation, Min (dB)	30		
Port to Port Isolation, Typ (dB)	35		
VSWR, Typ	2.0:1		
Impedance, (Ohm)	50		
Power Handling, CW, (W)	10		
Power Handling, Peak, (W)	20		

## Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Antenna Measurement Reflector Feed Far-field Measurement Planar Near-Field Measurement Cylindrical Near-Field Measurement Spherical Near-Field Measurement CATR System Intergration
-------------	---	--------------	--

## Outline Drawing

2.4mm-Female Output (P/N: LB-CSJ-40400-2.4F)

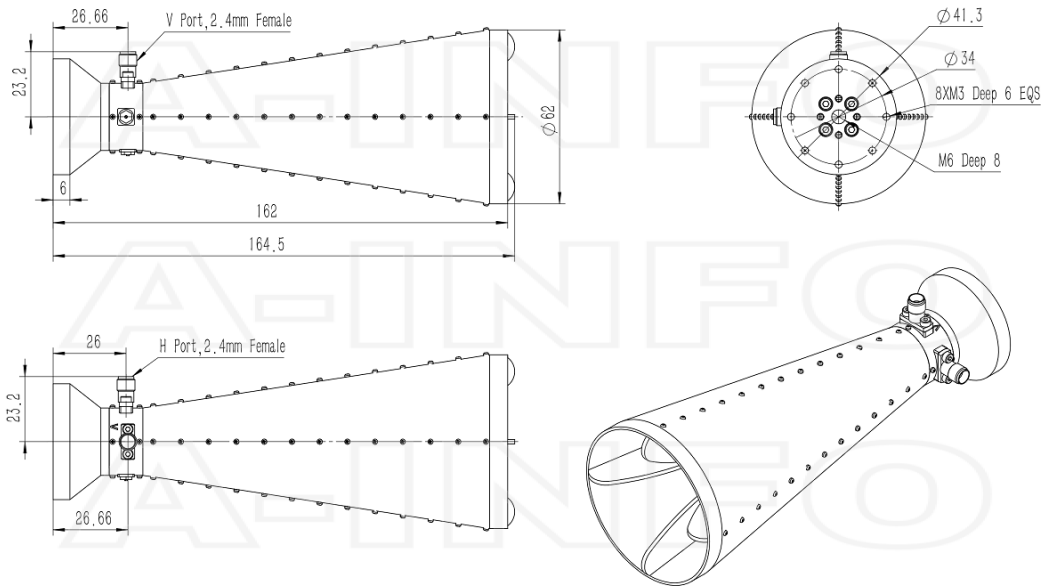


2.4mm-Female Output with L Type Mounting Bracket (Option, P/N: LB-20180-L)

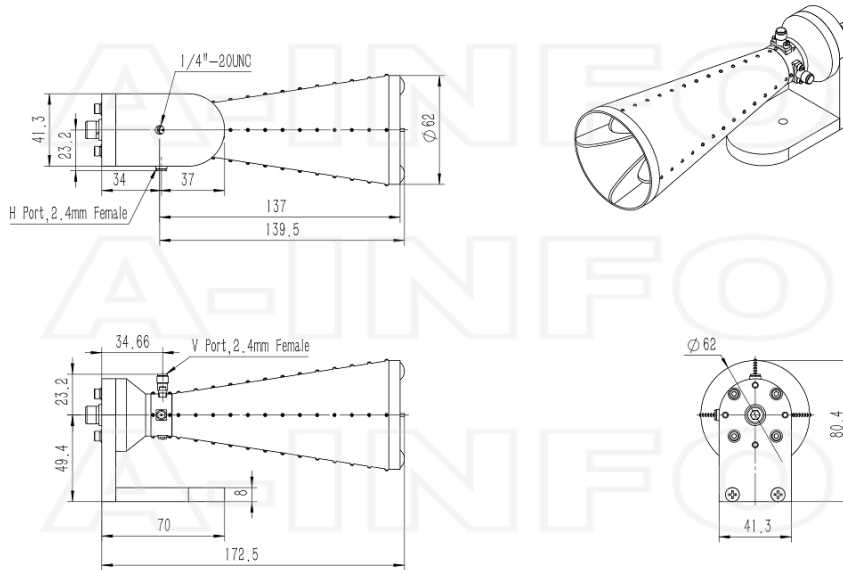


## Typical Test Results

### Gain

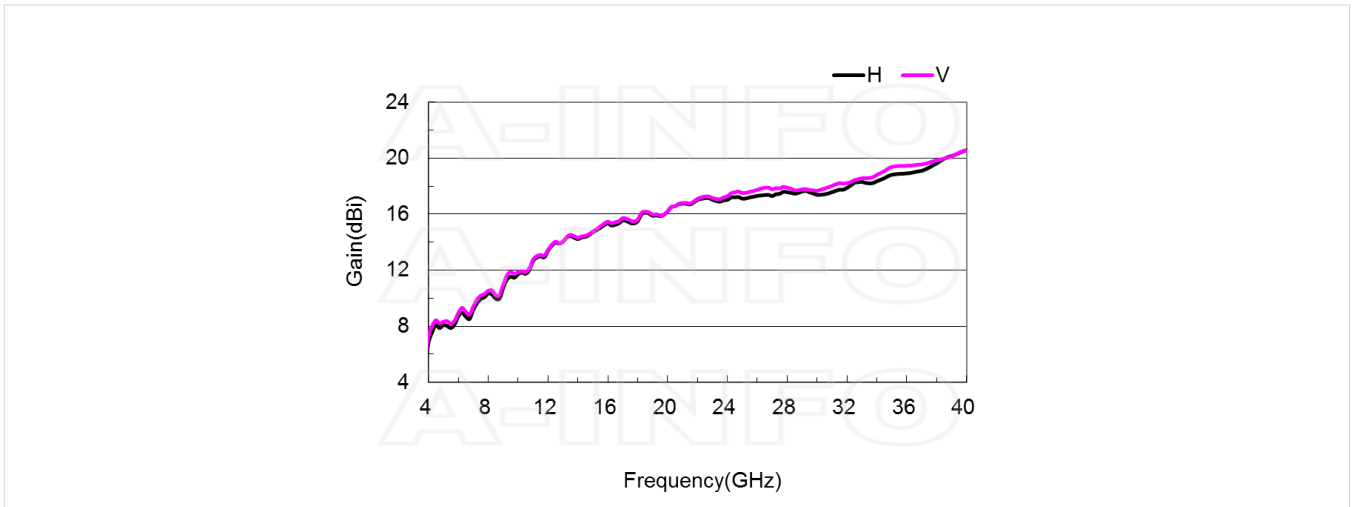


### Antenna Factor

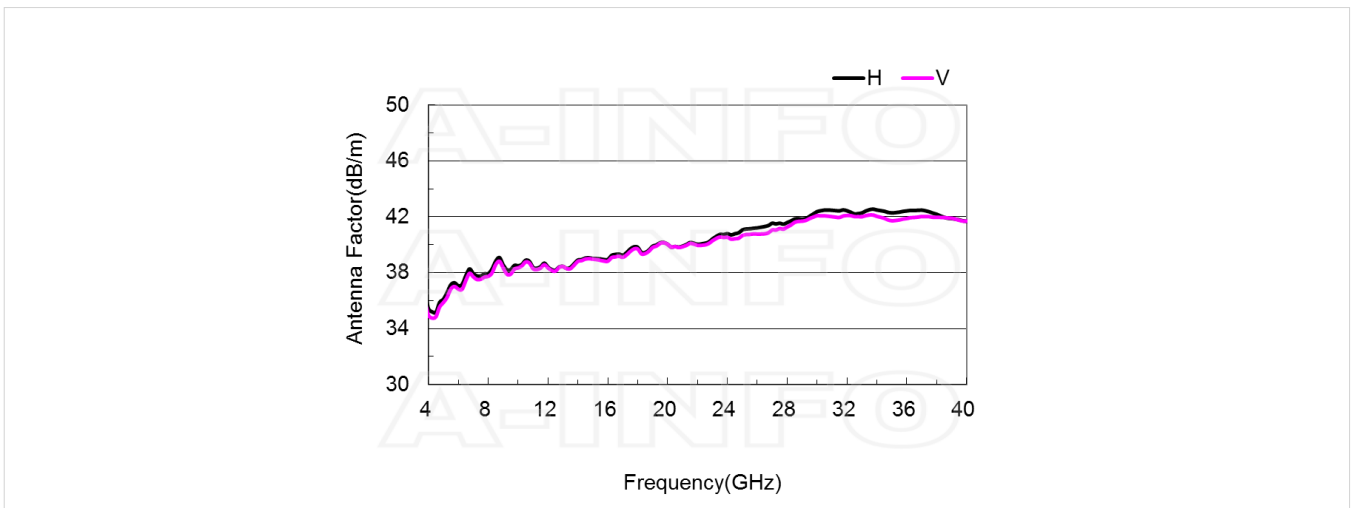


## Antenna Factor (Table)

Frequency(GHz)	Horizontal		Vertical	
	Gain(dBi)	AF(dB/m)	Gain(dBi)	AF(dB/m)
4.0	6.83	35.43	7.29	34.96
5.0	8.09	36.10	8.32	35.87
6.0	8.71	37.07	8.95	36.83
7.0	9.17	37.94	9.41	37.71
8.0	10.34	37.93	10.53	37.74
9.0	10.74	38.56	10.94	38.35
10.0	11.71	38.50	11.86	38.35
12.0	13.40	38.40	13.46	38.34
14.0	14.23	38.90	14.32	38.81
16.0	15.35	38.94	15.47	38.82
18.0	15.50	39.82	15.62	39.70
20.0	16.20	40.03	16.20	40.03
22.0	17.03	40.03	17.10	39.96
24.0	17.02	40.79	17.28	40.53
26.0	17.30	41.21	17.75	40.76
28.0	17.56	41.59	17.88	41.27
30.0	17.38	42.37	17.67	42.08
32.0	17.88	42.43	18.22	42.09
34.0	18.35	42.49	18.81	42.03
36.0	18.91	42.42	19.46	41.88
38.0	19.62	42.18	19.84	41.97
40.0	20.58	41.68	20.57	41.68

## Cross Polarization Isolation

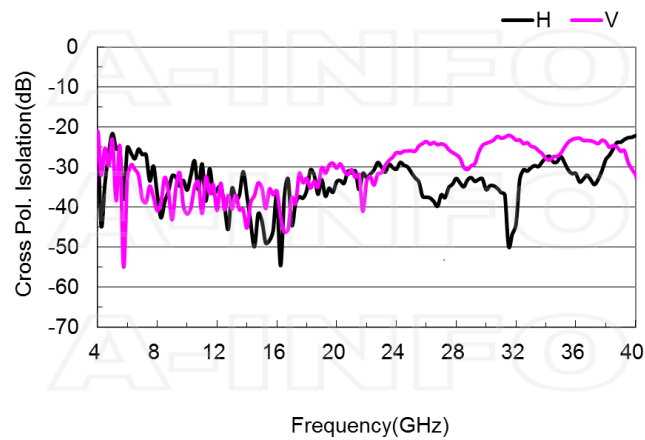


### Port to Port Isolation

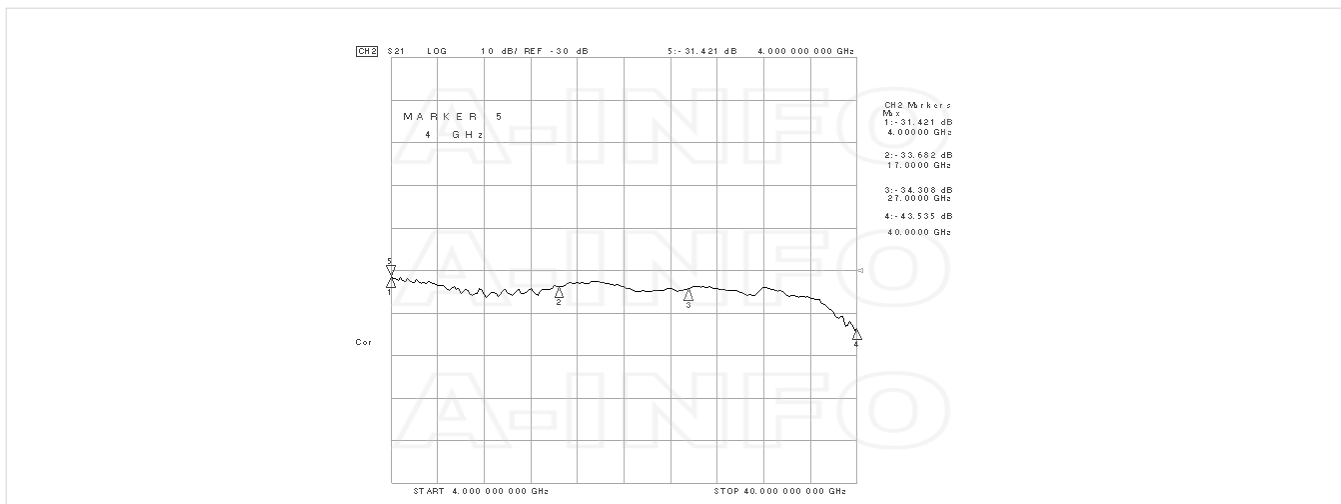


### VSWR

#### Port-H

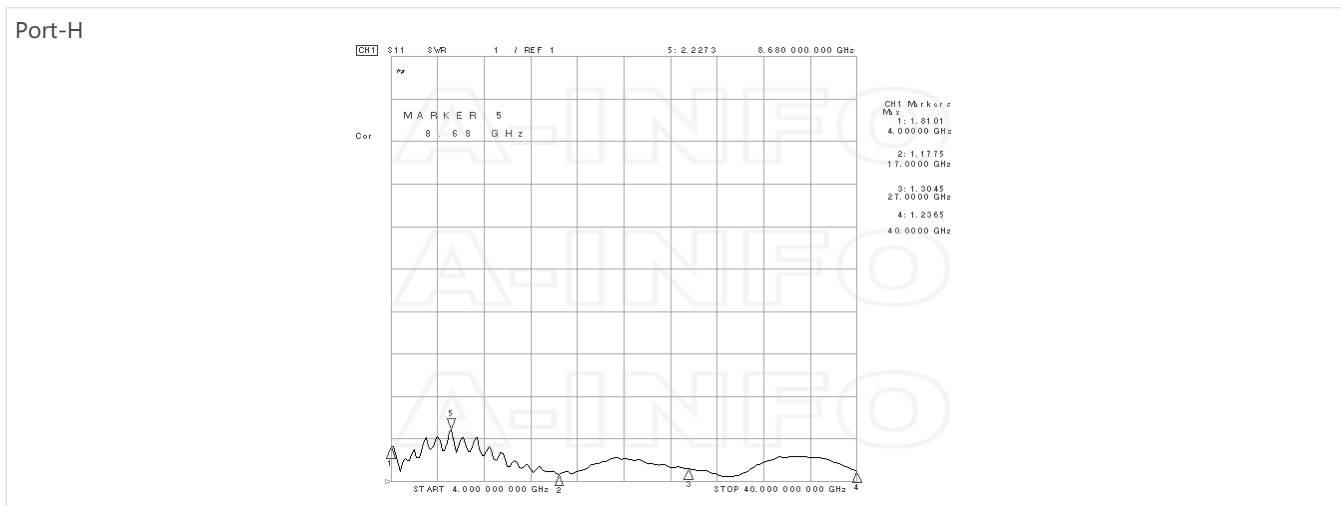


#### Port-V

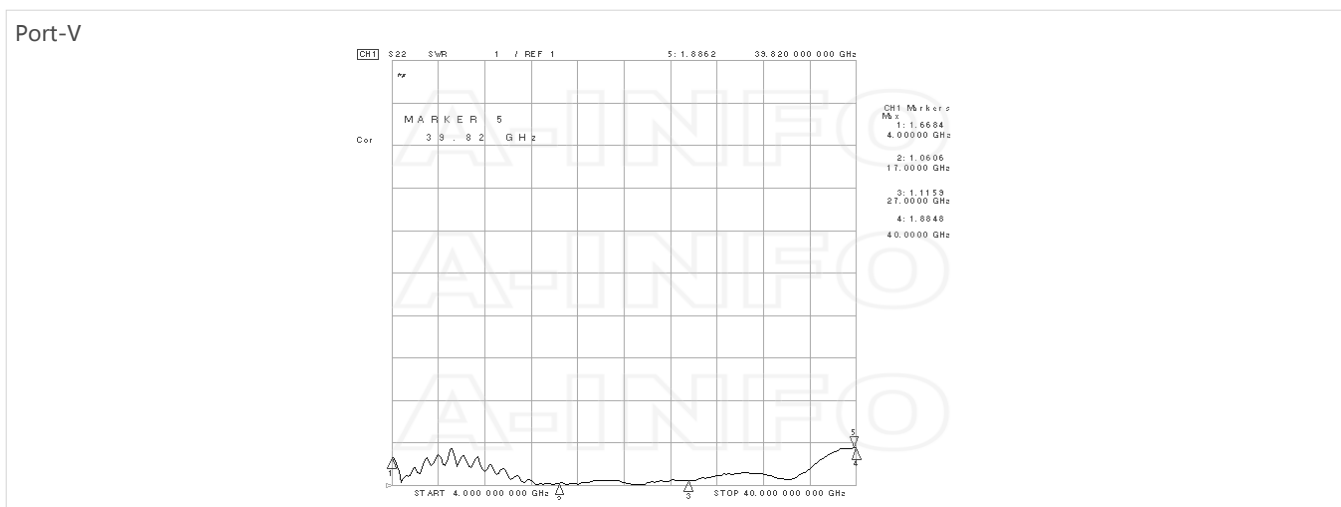


## Beamwidth

3dB Beamwidth

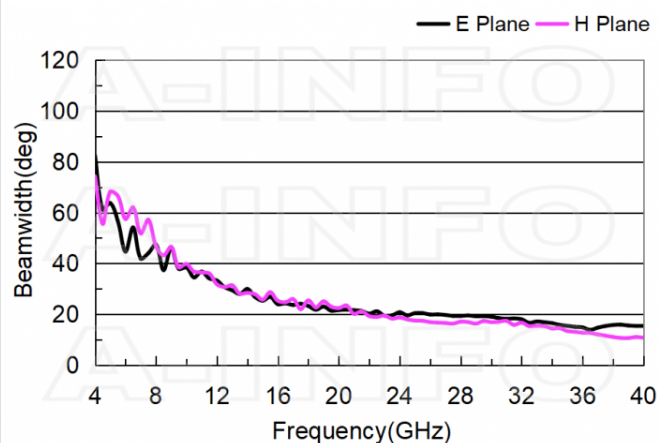


10dB Beamwidth

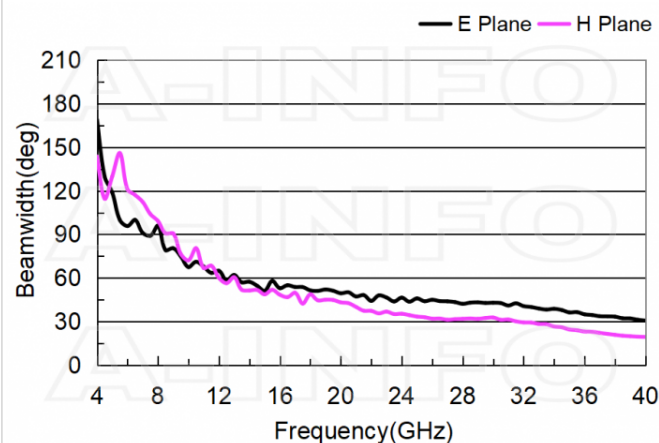


## Pattern 1


Frequency:4.000GHz

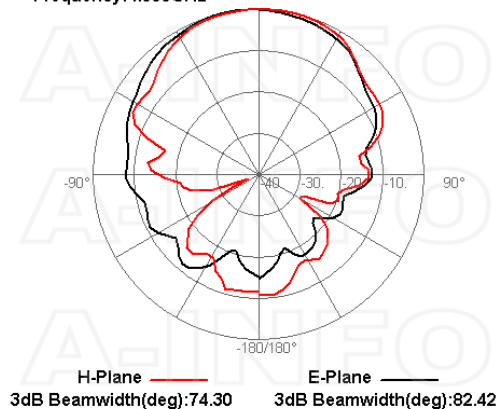


Frequency:5.000GHz

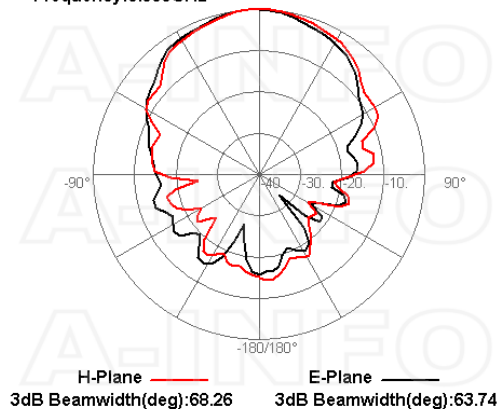


Frequency:6.000GHz

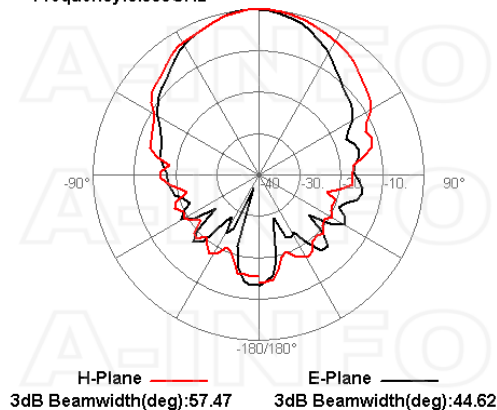


Frequency:7.000GHz

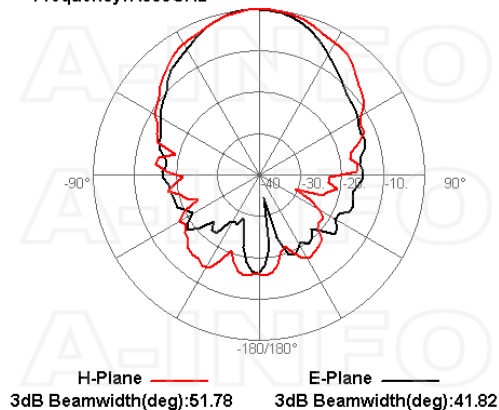


Frequency:8.000GHz

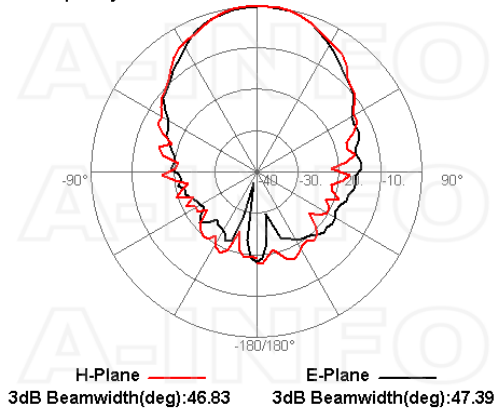


Frequency:9.000GHz

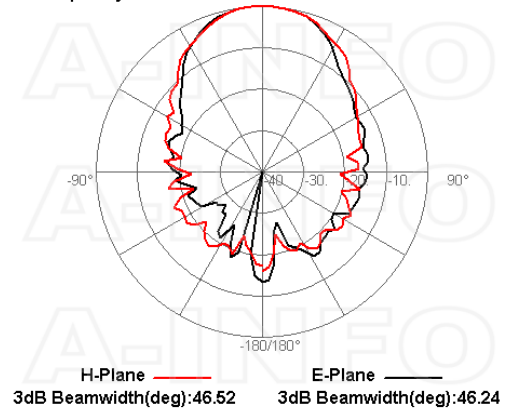


Frequency:10.000GHz

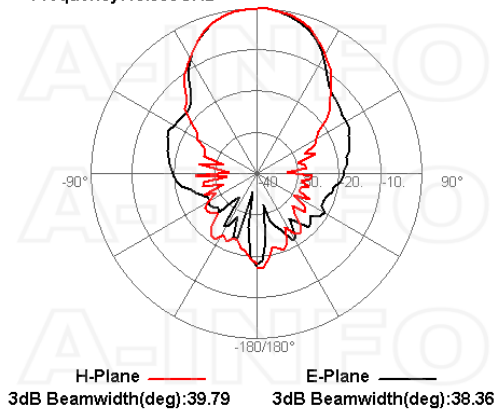


Frequency:12.000GHz

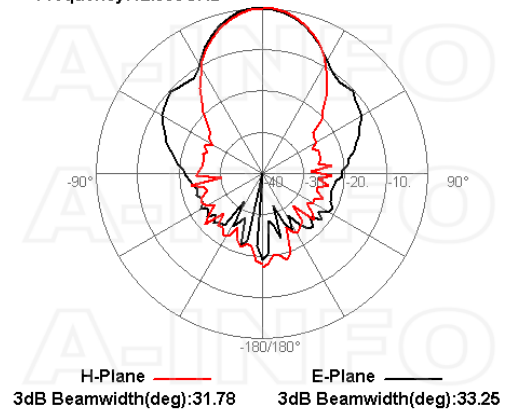


Frequency:14.000GHz

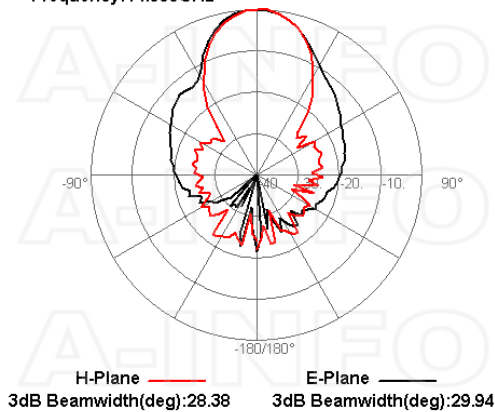


Frequency:16.000GHz

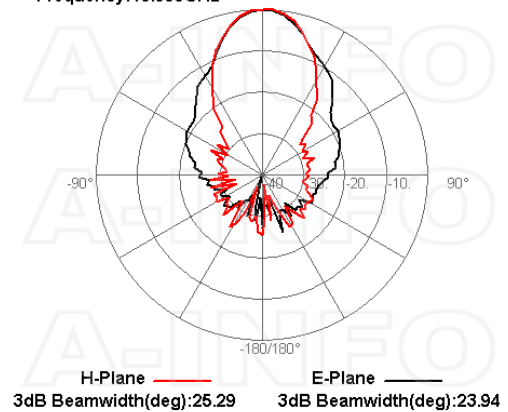


Frequency:18.000GHz

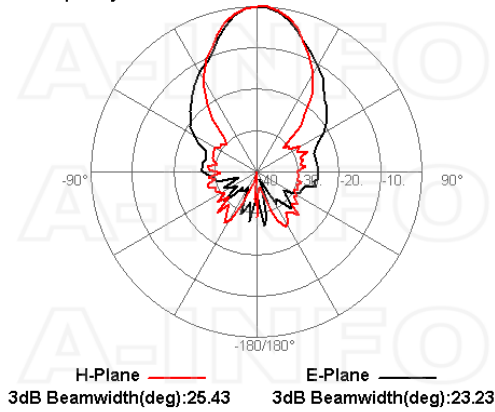


Frequency:20.000GHz

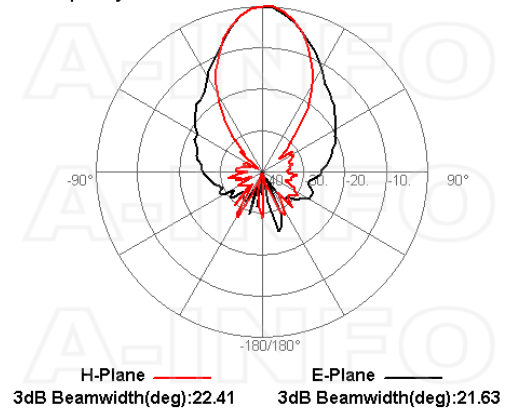


Frequency:22.000GHz

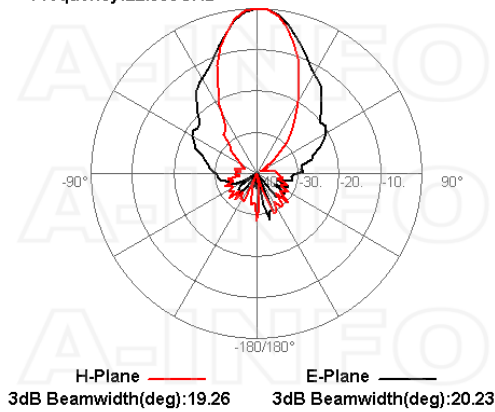


Frequency:24.000GHz

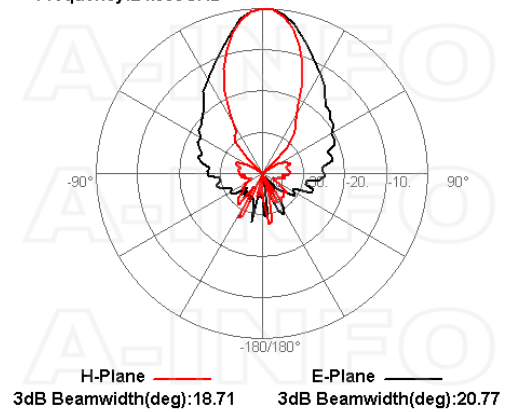


Frequency:26.000GHz

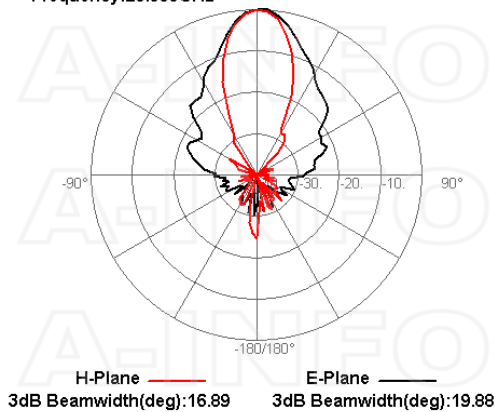


Frequency:28.000GHz

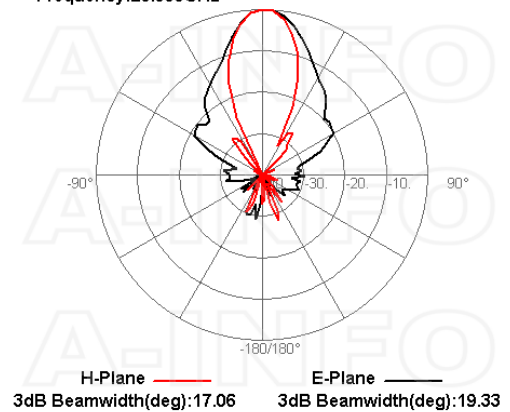


Frequency:30.000GHz

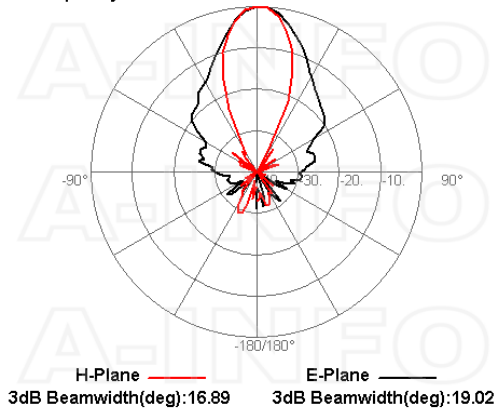


Frequency:32.000GHz

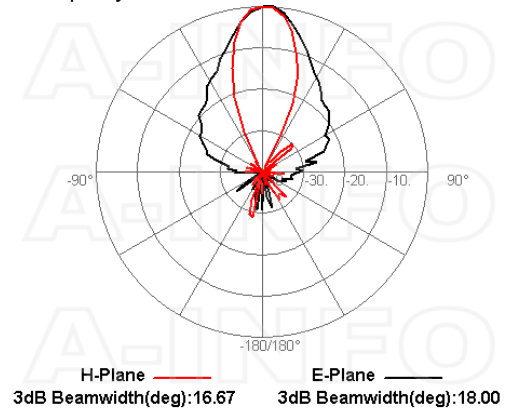


Frequency:34.000GHz

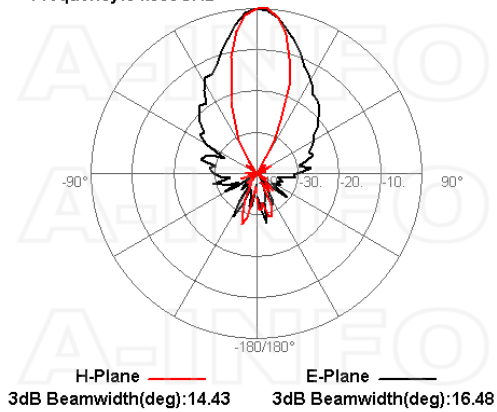


Frequency:36.000GHz

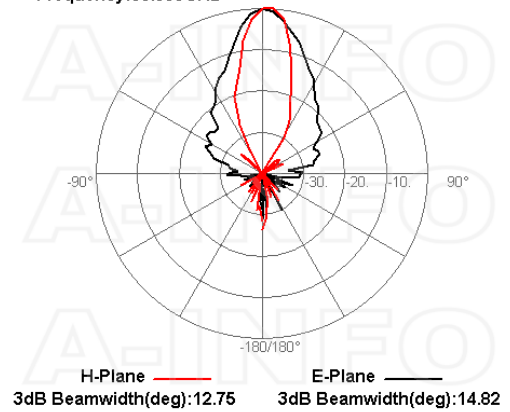

Frequency:38.000GHz

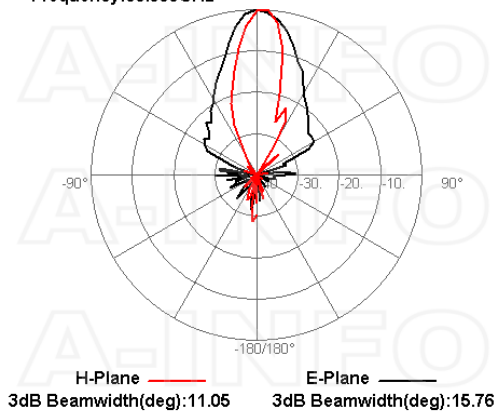

Frequency:40.000GHz

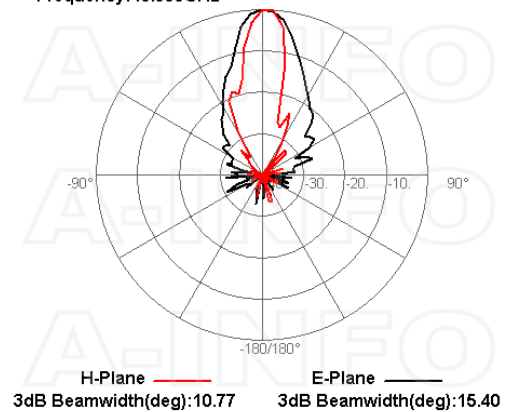

## Related Products



LB-20180-L L Type Mounting Bracket



Tripod\_15Kg AI Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



Carrying Case\_LB-CSJ-40400 AI Alloy Carrying Case



2.4M-2.4M-A050-500 Flexible Cable Assembly 500mm DC-40GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-A050-1000 Flexible Cable Assembly 1000mm DC-40GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-A050-1500 Flexible Cable Assembly 1500mm DC-40GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-A050-2000 Flexible Cable Assembly 2000mm DC-40GHz 2.4mm Male to 2.4mm Male




2.4M-2.4M-A050-3000 Flexible Cable Assembly 3000mm DC-40GHz 2.4mm Male to 2.4mm Male




2.4M-2.4M-A050-5000 Flexible Cable Assembly 5000mm DC-40GHz 2.4mm Male to 2.4mm Male




2.4M-2.4M-A050-10000 Flexible Cable Assembly 10000mm DC-40GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-300 Flexible Cable Assembly 300mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-500 Flexible Cable Assembly 500mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-1000 Flexible Cable Assembly 1000mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-1500 Flexible Cable Assembly 1500mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-2000 Flexible Cable Assembly 2000mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-3000 Flexible Cable Assembly 3000mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-5000 Flexible Cable Assembly 5000mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4M-B020-10000 Flexible Cable Assembly 10000mm DC-50GHz 2.4mm Male to 2.4mm Male



2.4M-2.4F-B020S-500 Flexible Cable Assembly 500mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-1000 Flexible Cable Assembly 1000mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-1500 Flexible Cable Assembly 1500mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-2000 Flexible Cable Assembly 2000mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-3000 Flexible Cable Assembly 3000mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-5000 Flexible Cable Assembly 5000mm DC-50GHz 2.4mm Male to 2.4mm Female



2.4M-2.4F-B020S-10000 Flexible Cable Assembly 10000mm DC-50GHz 2.4mm Male to 2.4mm Female

### About this Datasheet

<ul style="list-style-type: none"> <li>● <b>Product Information</b> Product Link: <a href="https://www.ainfoinc.com/lb-csj-40400-2-4f-conical-dual-polarization-horn-antenna-4-40-ghz-16db-gain-2-4mm-female">https://www.ainfoinc.com/lb-csj-40400-2-4f-conical-dual-polarization-horn-antenna-4-40-ghz-16db-gain-2-4mm-female</a> Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved</li> </ul>	<ul style="list-style-type: none"> <li>● <b>Contact Us</b> Address: 60 Tesla, Irvine, CA 92618, USA  Website: <a href="http://www.ainfoinc.com">www.ainfoinc.com</a>  Email: <a href="mailto:sales@ainfoinc.com">sales@ainfoinc.com</a></li> </ul>	<ul style="list-style-type: none"> <li>● <b>Phone &amp; Fax</b> Phone: +1-949-639-9688 +1-949-639-9608  Fax: +1-949-639-9670</li> </ul>
---	--	---