


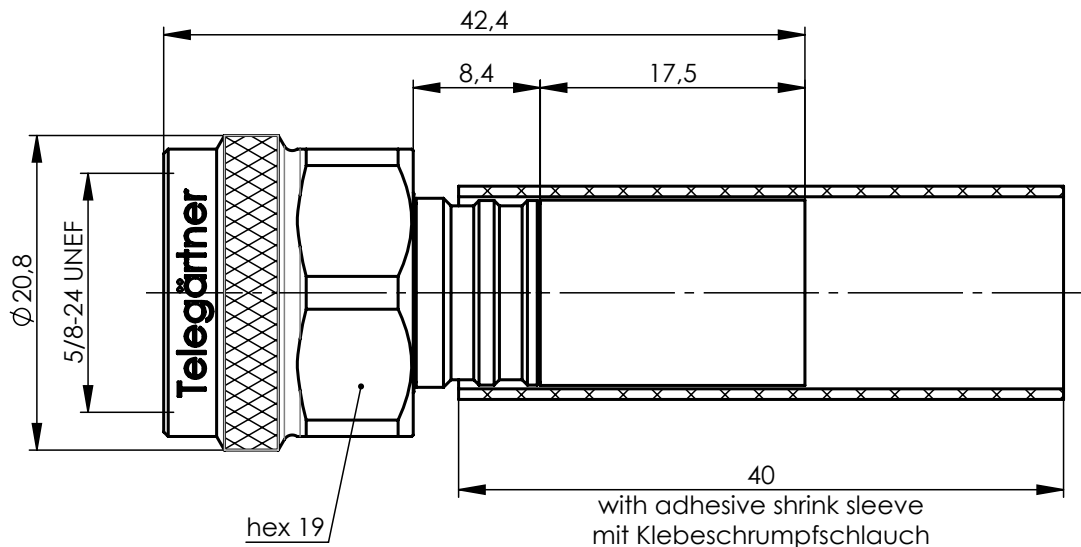

Mechanical characteristics

cables

interface dimensions acc. to assembly code
center conductor
outer conductor
mating life
coupling torque

Components

center conductor
crimp ferrule
other metal parts
insulator
gasket
adhesive shrink sleeve

Electrical characteristics

impedance
frequency
return loss

voltage proof
insulation resistance
contact resistance
center conductor
outer conductor

Environmental

operating temp.
protection class
RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdruckmoment

Bauteile

Innenleiter
Crimprohr
sonstige Metallteile
Isolierung
Dichtung
Klebeschrumpfschlauch

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflussschwingung

Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenleiter
Außenleiter

Umgebung

Betriebstemperatur
Schutzklasse
RoHS konform

2.7/7.3 AF, 2.7/7.3 CF, 213CRT7 Low Loss, 7810A, 9913, C2FCP, C2FP, CNT-400, EC 400, HPF 400, LMR-400, MRC 400 AFB, Speedfoam 400 HFJ, TZC 500 32, WBC-400, WCX400

IEC 61169-16

B4812

clamp / klemm

crimp

>500

4-6 Nm

Materials / Material

Copper alloy / Kupferlegierung
Copper / Kupfer
Brass / Messing
PTFE
Silicone/ Silikon
Polyolefine

Finish / Oberfläche

NiP-Au
CuSnZn
CuSnZn

(b)

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name		Datum/ date	Name/ name	Gewicht/ weight [g]	
				gez./ drawn	31.08.2022	PU		
				gepr./ appr.	15.03.2023	VM	ca./approx.	
				Maßstab/ scale	Benennung/ title			 Telegärtner
				2:1	N Plg str cl/cr LL400 N Plg str cl/cr LL400			
-	500000000721	06.10.2022	PU					
a	500000000970	09.03.2023	PU	untol. Maße/ dim. without tolerances according to	Unterl./ doc. type	Materialnr./ material no.		
b	500000002039	03.06.2025	PU		CUG	100120705		 Maße/ dimensions: mm
					Ersatz für/ replaces	PDM Nr./ pdm no.		Original : DIN A4
						10004762		Blatt/ sheet 1 von/ of 1

