


Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

Clic Clamp, 1/2" ALF,RCF,RLK polyamide black, halogen free
fire class UL94HB

FEATURES / BENEFITS

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws.
Simply push in by hand, clamp will grip and lock by applying slight pressure.



Technical Features

GENERAL SPECIFICATIONS

Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		Clic clamp
Transmission Line Type		ALFU RLK* RCF12-50*A HCA12-50 RHCA12-50
Cable Type		Air Dielectric Radiating Cable
Color		Black

MECHANICAL SPECIFICATIONS

Cable Size		1/2"
Number of Cable / Waveguide Runs		1
Material		Polyamide

TESTING AND ENVIRONMENTAL


Fire Class		UL94 HB
------------	--	---------

TEMPERATURE SPECIFICATIONS


Installation Temperature	°C (°F)	-20 to 80 (-4 to 176)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)

PACKAGING INFORMATION

Package Quantity		500
------------------	--	-----



clic_clamp_2_l1.gif

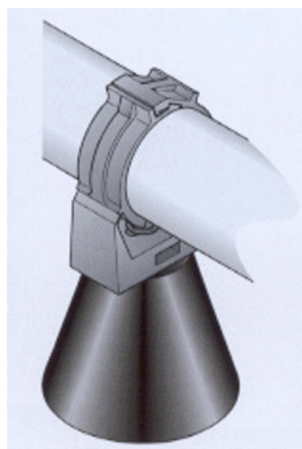

clic_clamp_1_l2.gif



Click clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

External Document Links

Notes

* valid for all cable versions