

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 UNLOCK SEEVE: BRASS, ALBALOY PLATED
- 5 CRIMP FERRULE: COPPER, NICKEL PLATED
- 6 GASKET: SILICONE RUBBER





ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+155°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/04/15	J. QU
B	OUTLINE DARWING CHANGED	03/09/15	J. QU

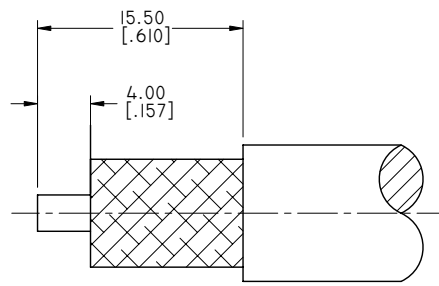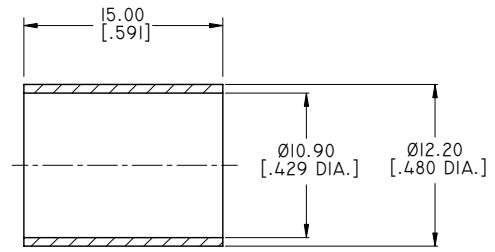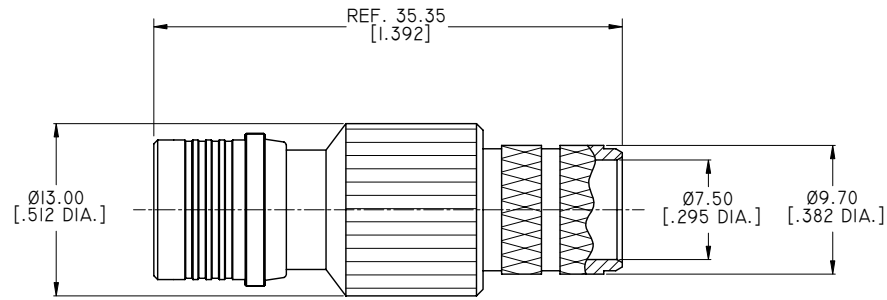

CABLE STRIPPING DIMENSIONS



HEX. CRIMP TOOL

CRIMP WIDTH: 12.0 [.472]

DRAWN	X. B. YANG	DATE	03/09/15
CHECKED	L. YANG	DATE	03/09/15
APPROVED	J. QU	DATE	03/09/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
QMA STRAIGHT MALE CRIMP FOR LMR400 CABLE			
VIEW		PART NO.	
		ANO 2611-2093	
SIZE	SCALE	SHEET	REV.
A3	2.5:1	I/1	B

4

3

2

1