

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, SILVER PLATED
- 3 OUTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
- 4 INSULATOR: PTFE & PEI

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-6 GHz
- 3 VSWR: 1.20 MAX.
- 4 PIM3: < -160 DBC(2X43 DBM) AT 0.4-4 GHz


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+125 °C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/11/20	J. QU
B	PIM3 DATA ADDED	09/10/20	J. QU

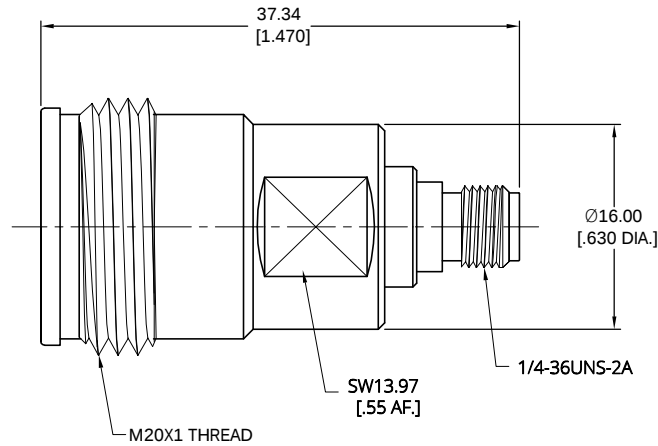

DRAWN	X. B. YANG	DATE	09/10/20
CHECKED	W. YANG	DATE	09/10/20
APPROVED	J. QU	DATE	09/10/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX ±0.13 [.005"]			
.X ±0.20 [.008"]			
X ±0.50 [.019"]			
.X° ±1°			
X° ±2°			
TITLE ADAPTER, 4.3-10 FEMALE TO SMA FEMALE VIEW PART NO. ANO 472-212-1540 SIZE A3 SCALE 2.5:1 SHEET 1/1 REV. B			

