


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	3/11/05	JCL

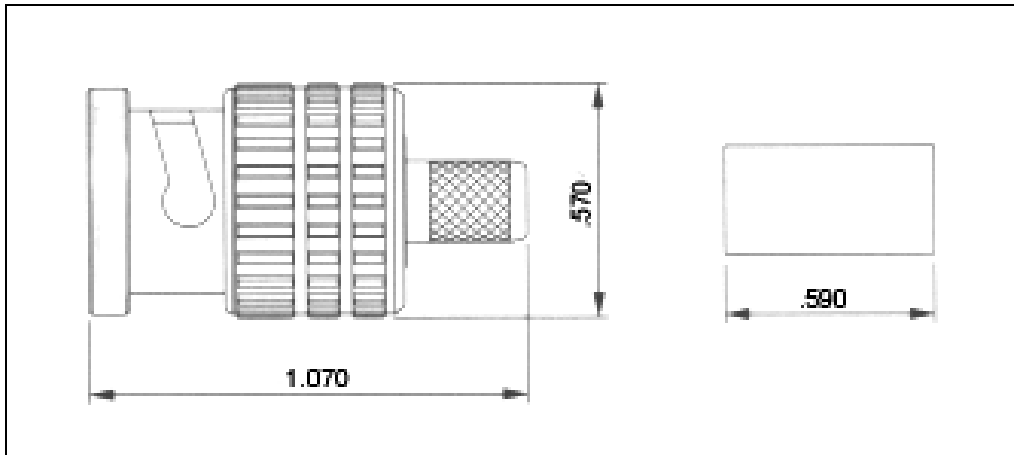

I. MATERIALS & FINISHES

center contact: Gold Plated Brass
 outer contact: Nickel plated Beryllium Copper
 body: Nickel Plated Brass
 coupling nut: Nickel Plated Brass
 crimp sleeve: Nickel Plated Copper
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 crimp size: .429" hex

II. ELECTRICAL PROPERTIES

impedance: 75 ohms
 vswr: 1.1:1 (max) up to 2 GHz
 insertion loss: 0.1 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	3/11/05
Check		
Prj. Mgr.		
Prd. Mgr.		
QA Mgr.		



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-400-BM-75

Type-BNC male plug
 for LMR-400-75 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1808
Scale: NA	Rev. (-)	Sheet: 1 of 1