

LB-1401100-1.0F Broadband Horn Antenna 14-110GHz 13dB Gain 1.0mm Female



Broadband Horn Antenna Operating From 14GHz to 110GHz With a Nominal 13dB Gain With 1.0mm Female Connector, Carrying Box included

### Product Information

SKU	LB-1401100-1.0F	Patents	US 11442093 (USA) US D978843 (USA)
-----	-----------------	---------	---------------------------------------

### Description

Broadband horn antenna LB-1401100-1.0F, operating from 14 to 110GHz with a nominal 13dB gain and low VSWR 1.5:1 with 1.0mm Female output connector. The model LB-1401100-1.0F has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 4W continuously and 8W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This broadband horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

### Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	14	Output Type	Coaxial
Frequency, Max (GHz)	110	Connector	1.0mm
Gain, Typ (dBi)	13	Connector Gender	Female
Polarization	Linear	Mechanical Specification	
3dB Beamwidth, E-Plane, Min (Deg.)	11	Body Material	Al
3dB Beamwidth, E-Plane, Max (Deg.)	75	Finish	Gold Plated and Chemical Conversion Coating
3dB Beamwidth, H-Plane, Min (Deg.)	9	Size, W (mm)	41.3
3dB Beamwidth, H-Plane, Max (Deg.)	67	Size, H (mm)	41.3
Cross Pol. Isolation, Typ (dB)	35	Size, L (mm)	65
VSWR, Typ	1.5:1	Weight, (kg)	0.1
Impedance, (Ohm)	50		
Power Handling, CW, (W)	4		
Power Handling, Peak, (W)	8		

## Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration
-------------	---	--------------	---

## Outline Drawing

1.0mm-Female Output (P/N: LB-1401100-1.0F)

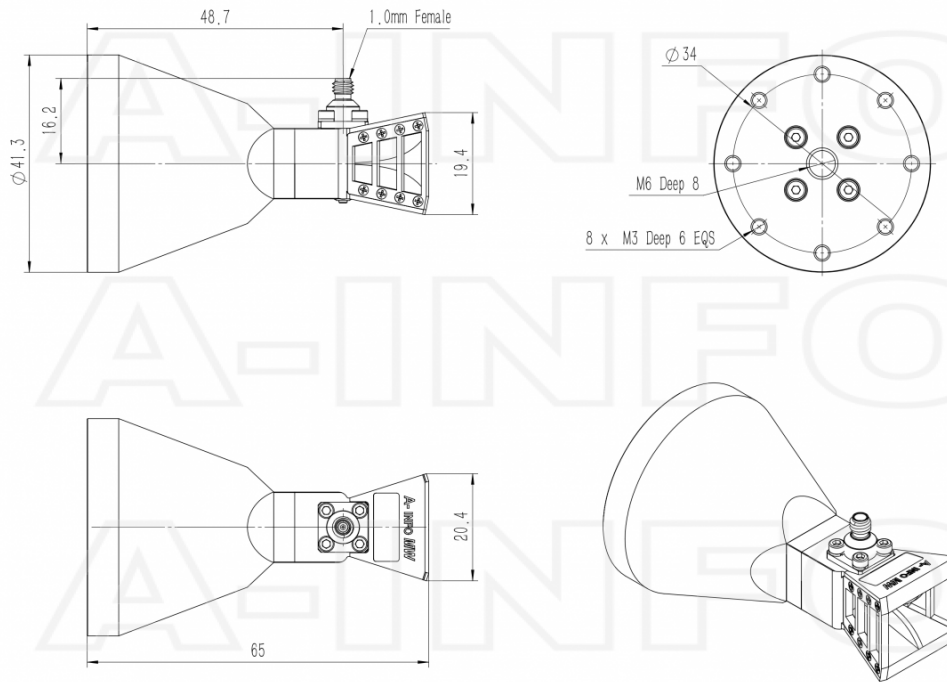


1.0mm-Female Output with L Type Mounting Bracket (Option, P/N:LB-20180-L)

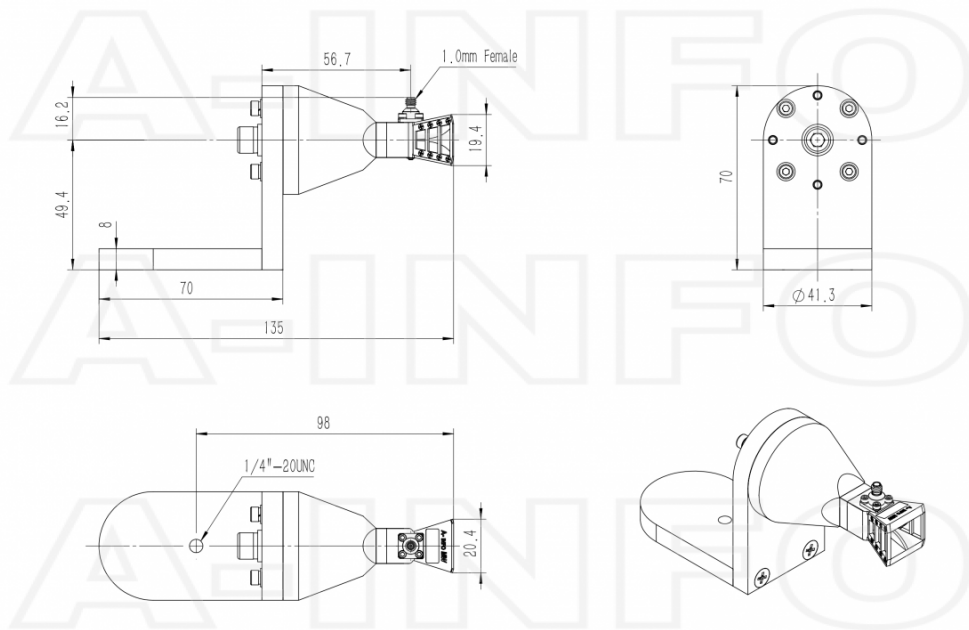


## Typical Test Results

### Gain

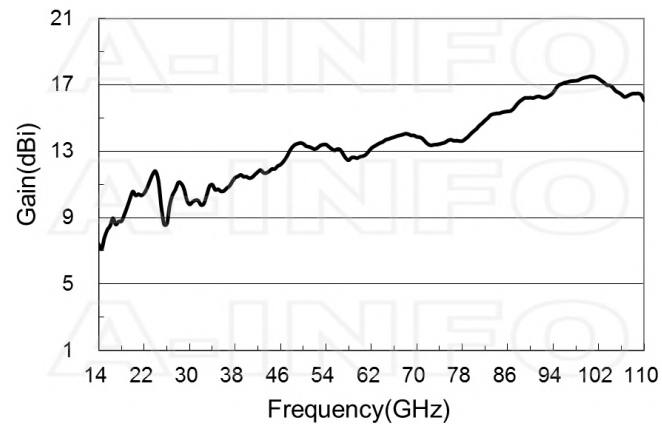


## Antenna Factor

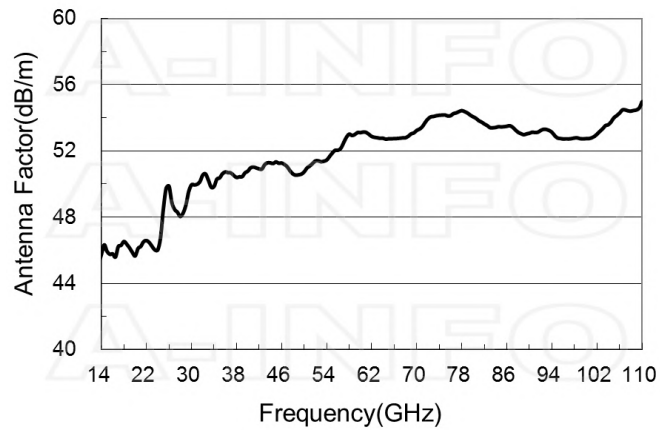


## Antenna Factor (Table)

Frequency(GHz)	Gain(dBi )	Antenna Factor(dB/m)
14.0	7.38	45.76
15.0	7.80	45.94
20.0	10.57	45.66
25.0	9.67	48.50
30.0	9.80	49.95
35.0	10.71	50.38
40.0	11.47	50.78
45.0	11.93	51.34
50.0	13.45	50.74
55.0	13.14	51.87
60.0	12.67	53.11
65.0	13.73	52.74
70.0	13.87	53.25
75.0	13.54	54.17
80.0	14.21	54.06
85.0	15.34	53.45
90.0	16.23	53.07
95.0	16.99	52.78
100.0	17.47	52.74
105.0	16.63	54.00
110.0	16.06	54.97


## Cross Polarization Isolation

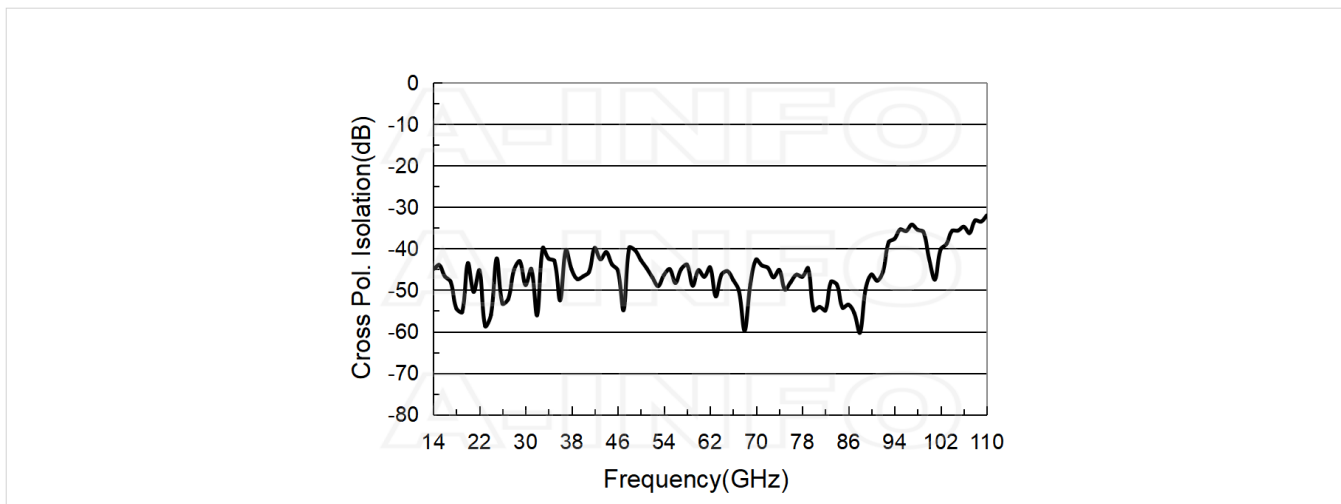


## VSWR

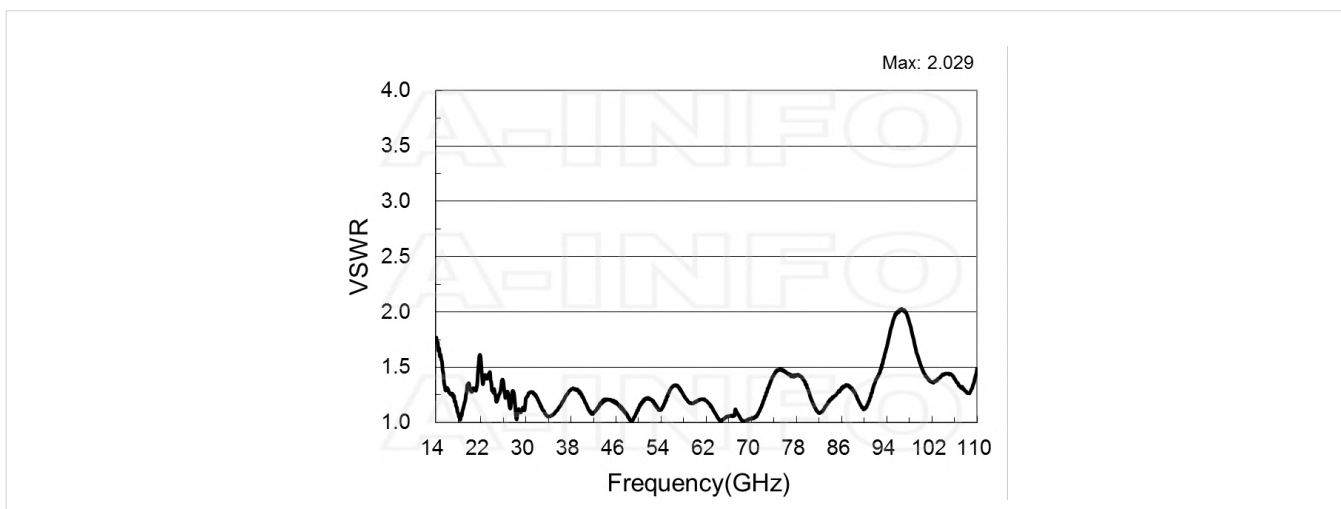


## Beamwidth

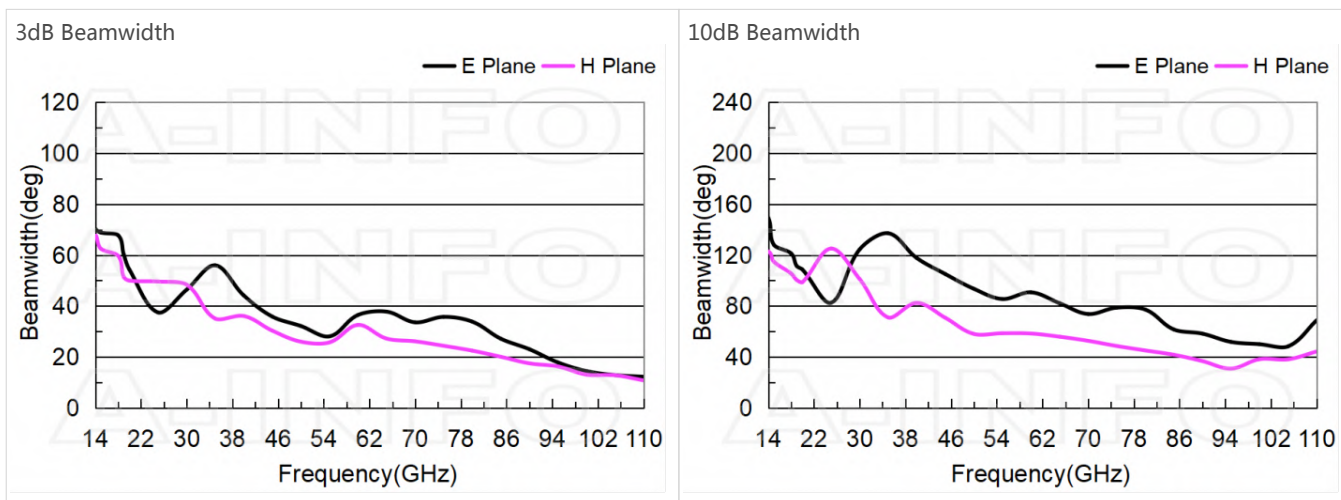


Pattern

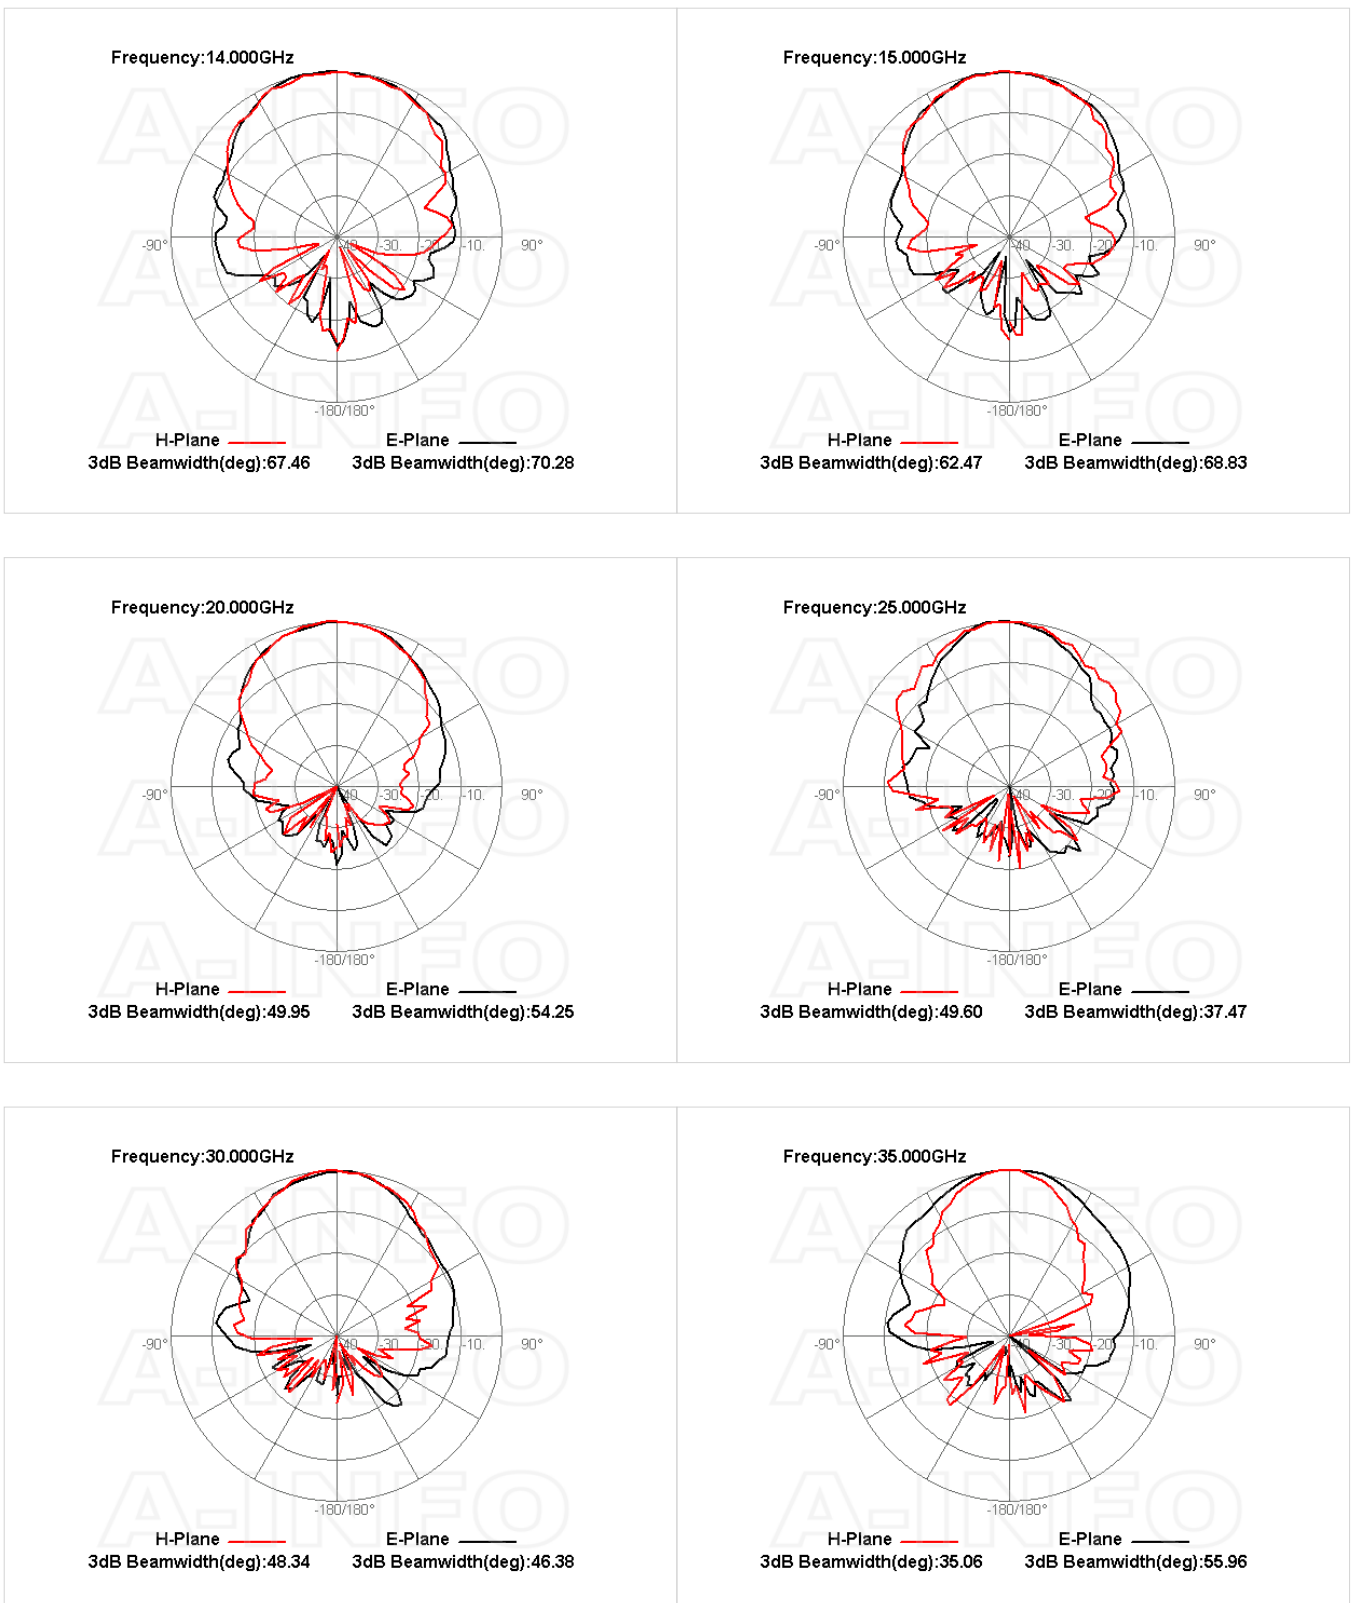


Frequency:40.000GHz

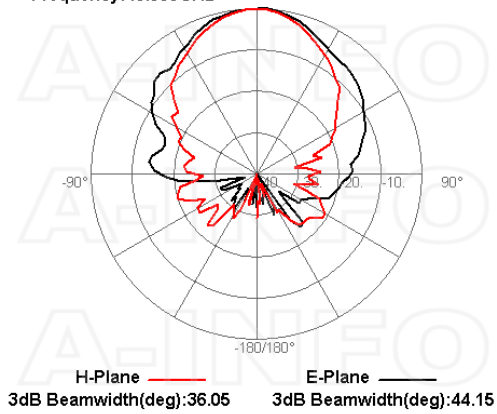


Frequency:45.000GHz

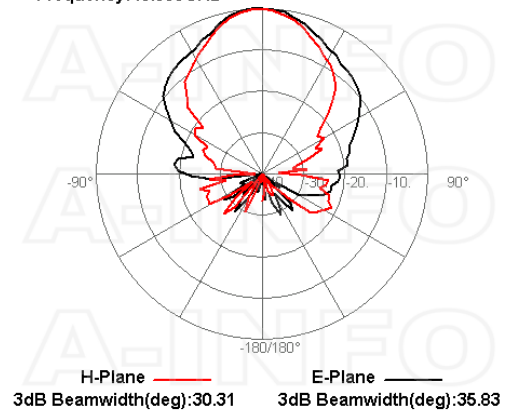


Frequency:50.000GHz

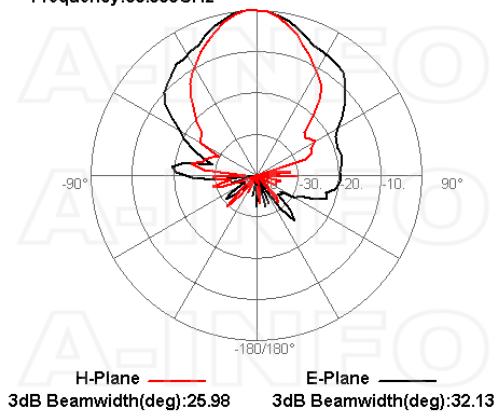


Frequency:55.000GHz

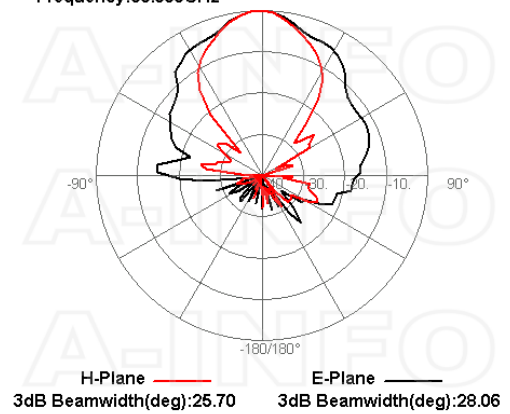


Frequency:60.000GHz

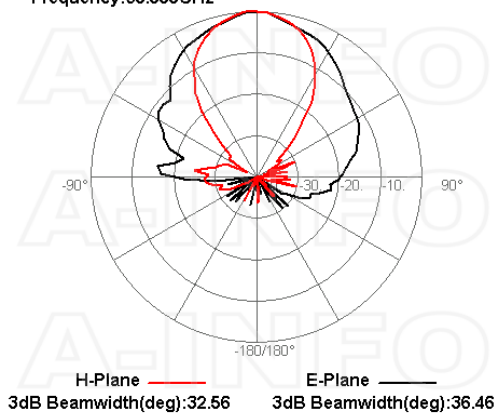


Frequency:65.000GHz

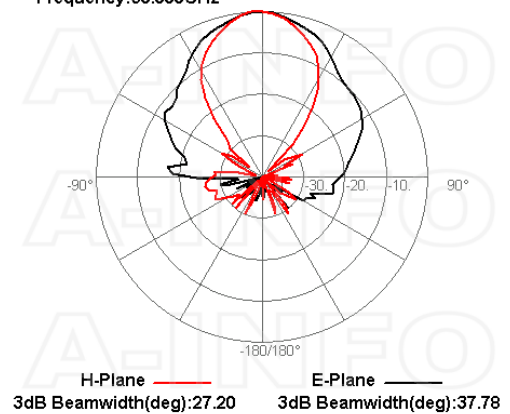


Frequency:70.000GHz

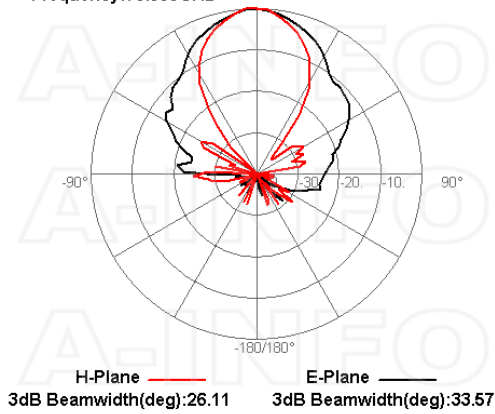


Frequency:75.000GHz

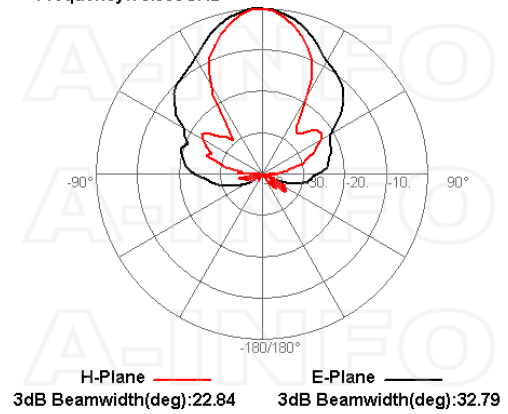


Frequency:80.000GHz

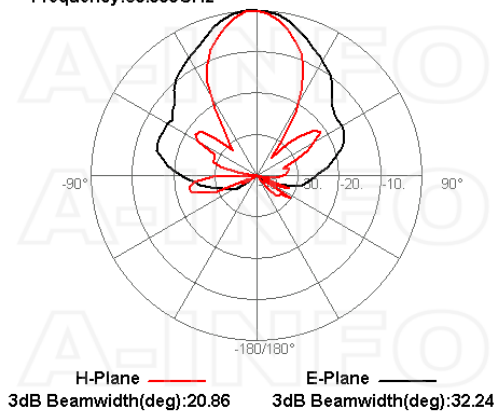


Frequency:85.000GHz



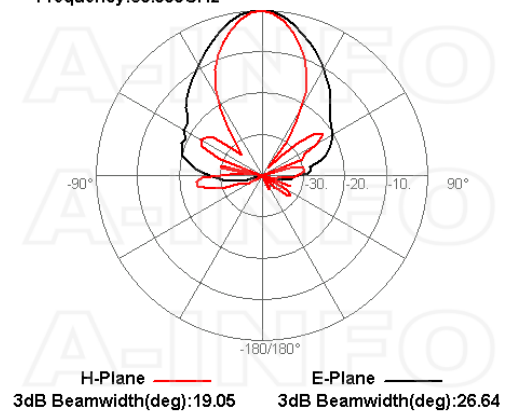


Frequency:90.000GHz

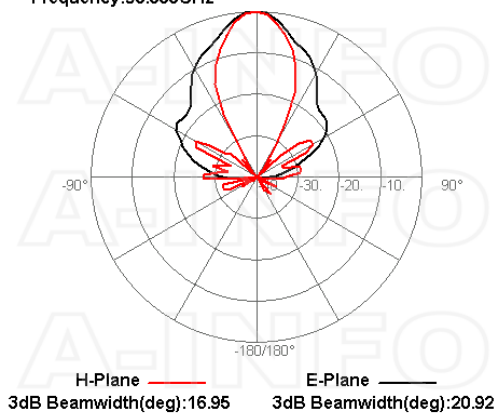

Frequency:95.000GHz

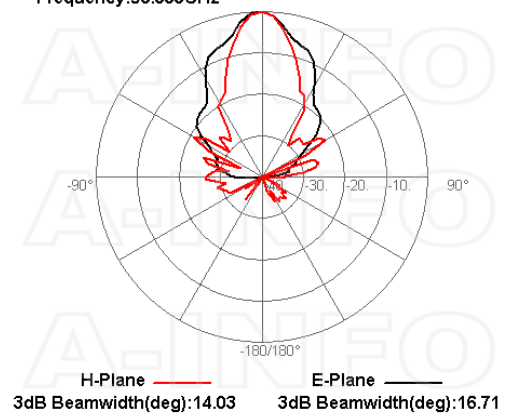

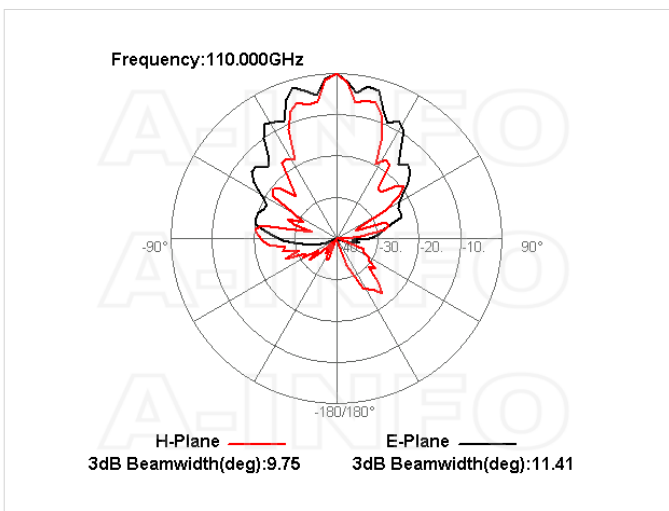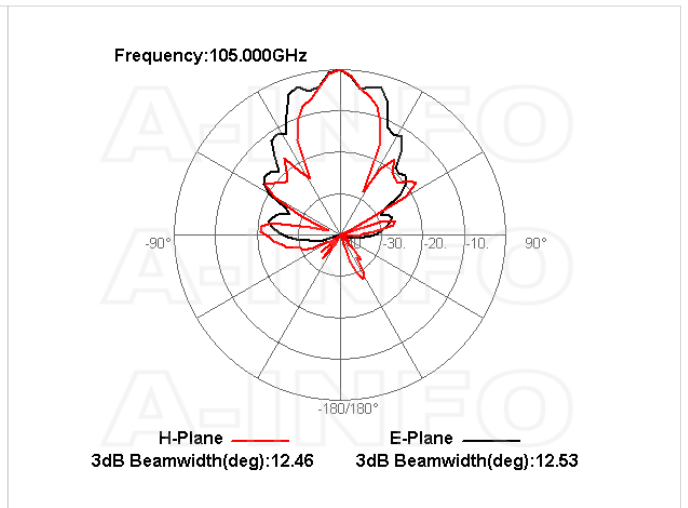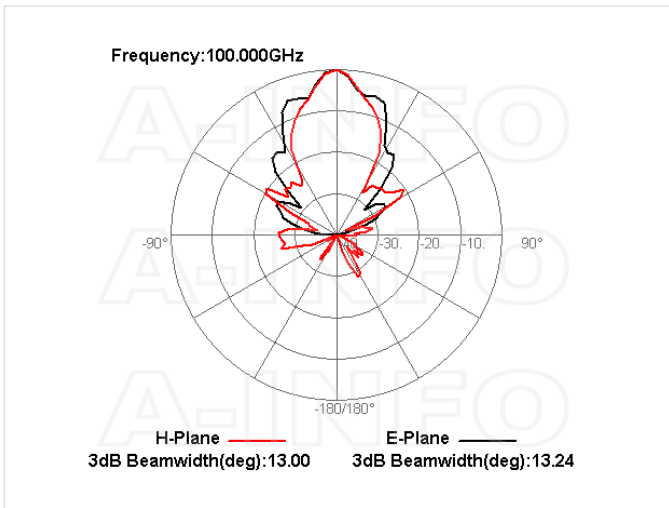

## Related Products



LB-20180-L L Type Mounting Bracket



Tripod\_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



Carrying Case\_LB-1001100 Al Alloy Carrying Case



1.0M-1.0M-C010-150 Flexible Cable Assembly 150mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-200 Flexible Cable Assembly 200mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-300 Flexible Cable Assembly 300mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-500 Flexible Cable Assembly 500mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-1000 Flexible Cable Assembly 1000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-1500 Flexible Cable Assembly 1500mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-2000 Flexible Cable Assembly 2000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-3000 Flexible Cable Assembly 3000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-5000 Flexible Cable Assembly 5000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010-10000 Flexible Cable Assembly 10000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-500 Flexible Cable Assembly 500mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-1000 Flexible Cable Assembly 1000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-1500 Flexible Cable Assembly 1500mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-2000 Flexible Cable Assembly 2000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-3000 Flexible Cable Assembly 3000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-5000 Flexible Cable Assembly 5000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0M-C010M-10000 Flexible Cable Assembly 10000mm DC-110GHz 1.0mm Male to 1.0mm Male



1.0M-1.0F-C010M-1000 Flexible Cable Assembly 1000mm DC-110GHz 1.0mm Male to 1.0mm Female



1.0M-1.0F-C010M-2000 Flexible Cable Assembly 2000mm DC-110GHz 1.0mm Male to 1.0mm Female



1.0M-1.0F-C010M-3000 Flexible Cable Assembly 3000mm DC-110GHz 1.0mm Male to 1.0mm Female



1.0M-1.0F-C010M-5000 Flexible Cable Assembly 5000mm DC-110GHz 1.0mm Male to 1.0mm Female



1.0M-1.0F-C010M-10000 Flexible Cable Assembly 10000mm DC-110GHz 1.0mm Male to 1.0mm Female

### Similar Products



LB-60670-1.85F Broadband Horn Antenna 6-67GHz 13dB Gain 1.85mm Female



LB-60670-1.85FSPO Broadband Horn Antenna 6-67GHz 13dB Gain 1.85mm Female



LB-1001100-1.0F Broadband Horn Antenna 10-110GHz 13dB Gain 1.0mm Female



LB-1801100-1.0F Broadband Horn Antenna 18-110GHz 14dB Gain 1.0mm Female



LB-SJ-40400-KF Broadband Dual Polarization Horn Antenna 4-40GHz 12dB Gain 2.92mm Female



LB-SJ-40400-KFSPO Broadband Dual Polarization Horn Antenna 4-40GHz 12dB Gain 2.92mm Female



LB-SJ-40400-2.4F Broadband Dual Polarization Horn Antenna 4-40GHz 12dB Gain 2.4mm Female



LB-SJ-40400-2.4FSPO Broadband Dual Polarization Horn Antenna 4-40GHz 12dB Gain 2.4mm Female



LB-SJ-50500-2.4F Broadband  
Dual Polarization Horn Antenna  
5-50GHz 12dB Gain 2.4mm  
Female



LB-SJ-50500-1.85F Broadband  
Dual Polarization Horn Antenna  
5-50GHz 12dB Gain 1.85mm  
Female

## About this Datasheet

<ul style="list-style-type: none"> <li>• <b>Product Information</b> Product Link: <a href="https://www.ainfoinc.com/lb-1401100-1-0f-broadband-horn-antenna-14-110-ghz-13db-gain-1-0mm-female">https://www.ainfoinc.com/lb-1401100-1-0f-broadband-horn-antenna-14-110-ghz-13db-gain-1-0mm-female</a> Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved</li> </ul>	<ul style="list-style-type: none"> <li>• <b>Contact Us</b> Address: 60 Tesla, Irvine, CA 92618, USA  Website: <a href="http://www.ainfoinc.com">www.ainfoinc.com</a>  Email: <a href="mailto:sales@ainfoinc.com">sales@ainfoinc.com</a></li> </ul>	<ul style="list-style-type: none"> <li>• <b>Phone &amp; Fax</b> Phone: +1-949-639-9688 +1-949-639-9608  Fax: +1-949-639-9670</li> </ul>
---	--	---