



716M-LCF14-CAF

7-16 DIN Male Connector for LCF1/4 Coaxial Cable, CAF Series

CELLFLEX® 1/4" low loss connector



Technical Features

STRUCTURE

Cable Type	LCF	
Cable Size	1/4"	
Qualified Cable Types	LCF14-50J / LCF14-50JJFN	LCF14-50JJFN_EXP
Model Series	CAF Series	
Connector Interface Size	7/16 DIN	
Connector Interface Gender	Male	

MECHANICAL SPECIFICATIONS

Inner Conductor Material / Coating	Copper Alloy / Silver Plated
Outer Conductor Material / Coating	Copper Alloy / Silver Plated
Insulation Material	PTFE
Sealing Method	silicone rubber, heat-shrinkable adhesive tubing

ELECTRICAL SPECIFICATIONS

Nominal Impedance	50 Ω	
Connector Frequency Range	DC - 3.8 GHz GHz	
Frequency Range	VSWR	Return Loss
DC < f ≤ 1.0 GHz	1.02	40
1.0 < f ≤ 2.7 GHz	1.04	34
2.7 < f ≤ 3.8 GHz	1.06	30

TESTING AND ENVIRONMENTAL

Ingress Protection (IP) Rating	IP68
--------------------------------	------




716M-LCF14-CAF

7-16 DIN Male Connector for LCF1/4 Coaxial Cable, CAF Series

ACCESSORIES

Wrench Size Connector Interface	32mm (1.26in)
Wrench Size Connector Front Part	17mm (0.669in)
Wrench Size Connector Rear Part	13mm (0.512in)
Trimming Tool	

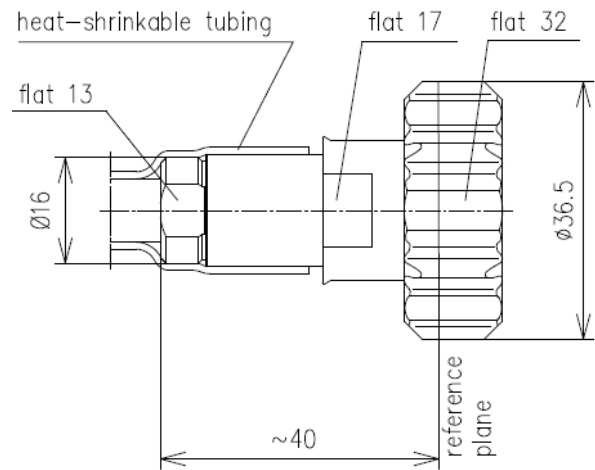

Related Documents



Install-Instr_Conn_LCF14_CAF
Installation Instructions